

TECHNOLOGY WE LIVE



ekdirect.com t our website



TECHNOLOGY WE NEED, WE CREATE & WE LIVE

Microtek is a renowned player in the power product market of India. We are the most trusted and preferred brand in India. No wonder it's our best-in-class products that have helped us to achieve the position as India's most trusted & preferred brand. Being a technology innovator and a pioneer in the power backup industry of India, Microtek stands tall as an epitome in the space with its capability of making reliable and latest technology incorporated products that are well accepted and appreciated by household consumers & the industrial sector across the globe. We have etched a name for ourselves as one of the most dedicated, reliable and affordable power brands across five continents.

With the motto of 'Technology We Need, Technology We Create & Technology We Live', We strive to constantly innovate and upgrade our products to become the most recognized brand in the industry. For us, innovation and customer satisfaction are the most important factors. To achieve our goals, we have always worked to develop advanced technologies & innovative methods with our expert teams. It is not just the R&D, manufacturing, or sales that we focus on; we endeavour to excel in everything including distribution, marketing, and most importantly customer service.

Microtek today is offering many products which deal with Power Backup Solutions, Solar Solutions, Voltage Stabilizers, Wires & Cables, Circuit Protection Devices (MCB, DBs), E-Vehicle Chargers & Health Care range of products. All of these products are of premium quality and are crafted to cater to the unique requirements of the consumers. However, the factor that predominantly differentiates the organization is its unrivalled level after-sales service Pan India. Backed by a fully enabled customer care call centre, Microtek achieves the utmost level of customer satisfaction through its unparalleled team of professionals, processes & technology.







MORE THAN 12 CRORE SMILING USERS

AVAILABLE GLOBALLY ACROSS 5 CONTINENTS

State of the art, global standard, fully automated manufacturing units for high quality products.


MORE THAN 60,000 DEALER NETWORK

Set up at various locations throughout the year to develop a strong relationship between the customers & company/dealers.


MORE THAN 1200 SERVICE ENGINEERS

A team of efficient and qualified engineers for faster resolution of complains within a turnaround time of 3 days.



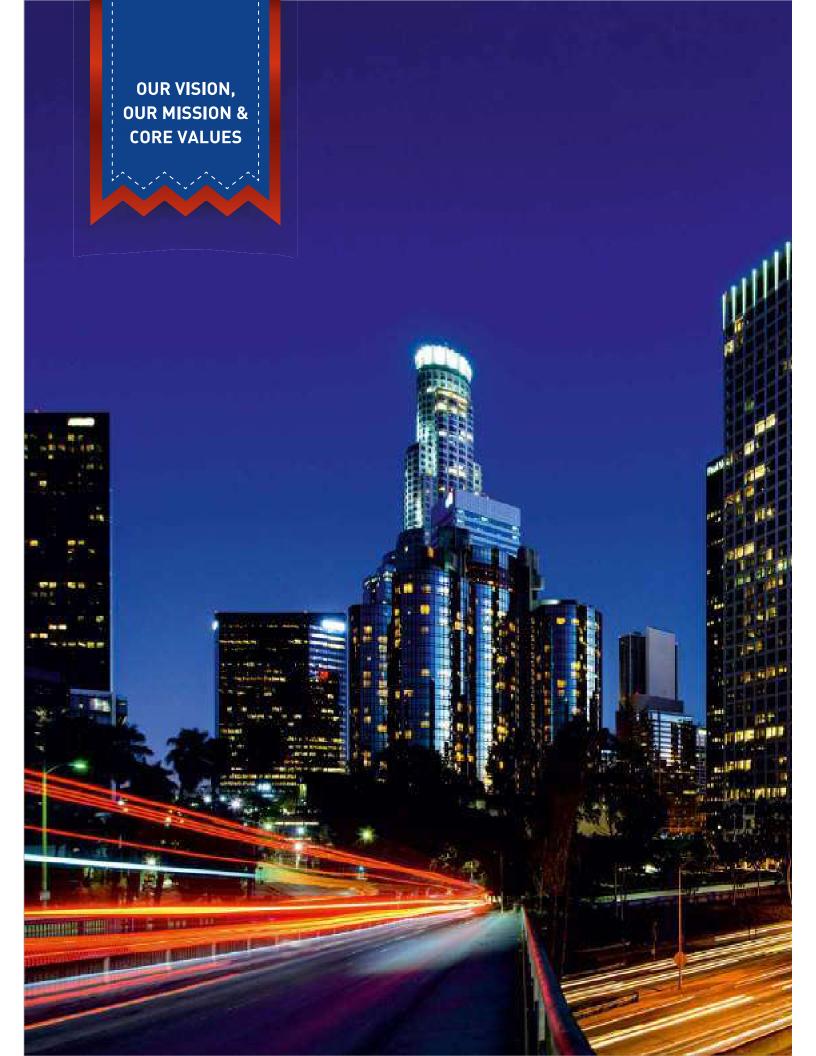



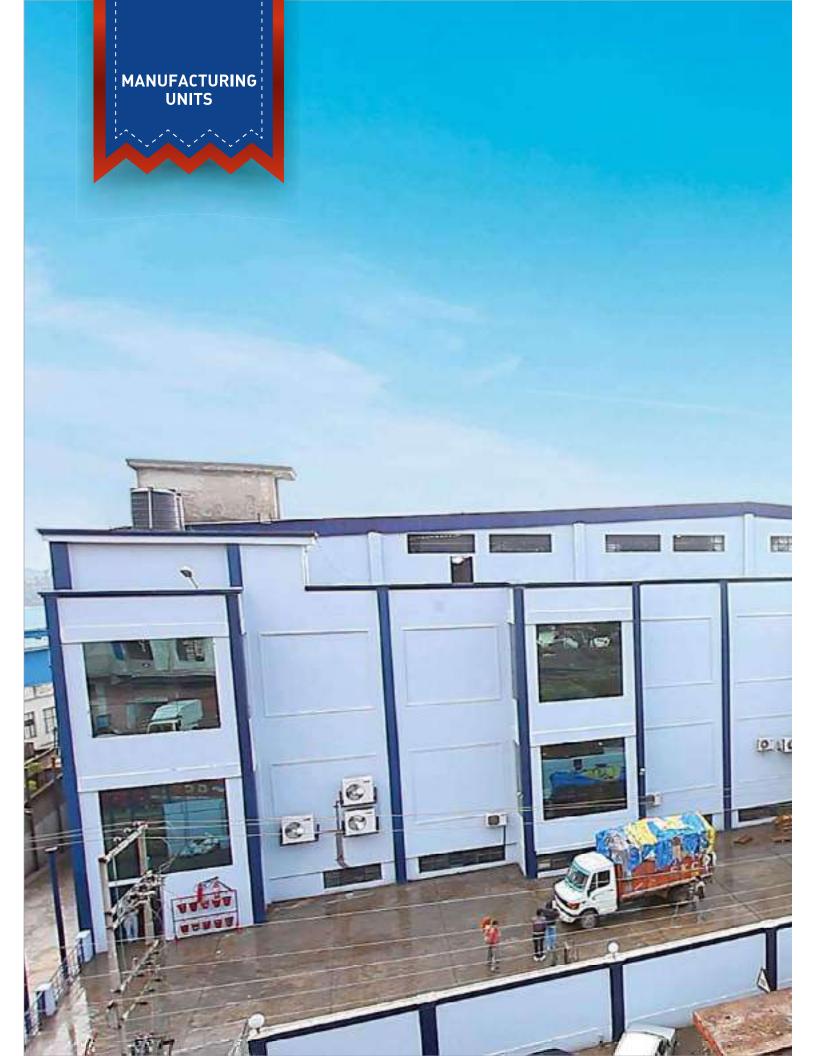





STATE OF THE ART, GLOBAL STANDARD, FULLY AUTOMATED MANUFACTURING UNITS FOR HIGH QUALITY PRODUCTS

Quality delivers quality. With a staunch belief in this, we have given special emphasis to our manufacturing units and the equipment, processes, methods and technologies we use. We have set up state-of-the-art automatic manufacturing plants equipped with hi-tech machines like SMT, ICT and Automatic Assembly Lines to name a few


- 10 fully automated plants in Parwanoo, Baddi (Himachal Pradesh) & Vishakhapatnam
- A state-of-the-art manufacturing facility in Global Locations
- Full-fledged R&D centre in New Delhi, India & in Global Locations
- 10000 sq. mt. area for production with a combined capacity of 1,30,000 units per month
- 200 highly skilled and dedicated engineers



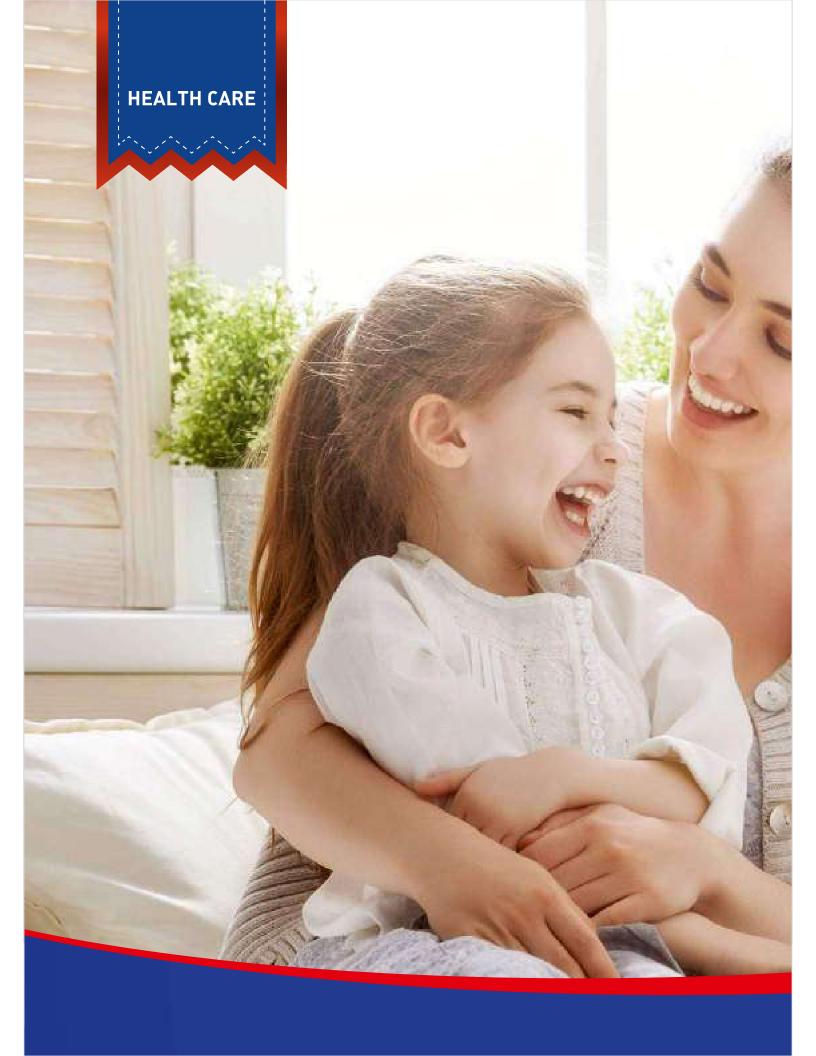

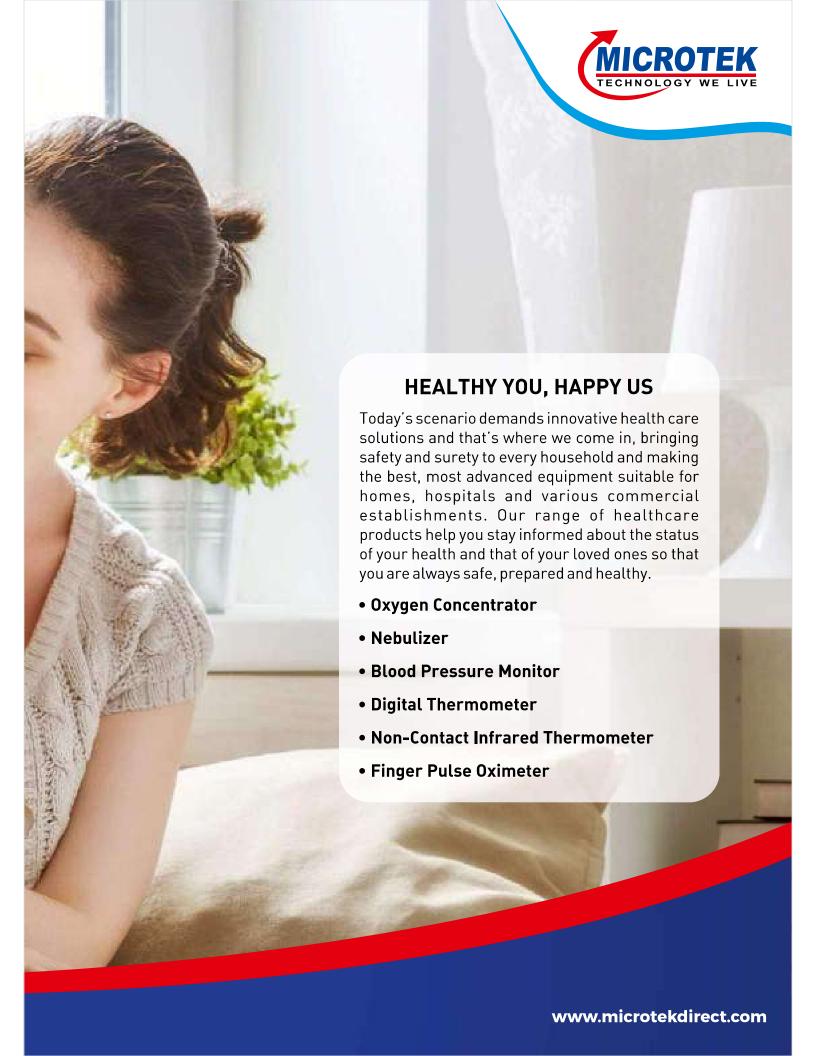





OXYGEN CONCENTRATOR

PORTABLE & EASY OXYGEN THERAPY. ANYTIME. ANYWHERE.









OXYFlow 10M OXYGEN CONCENTRATOR

Microtek **OXY***Flow* 10M is an oxygen concentrator, a type of medical device used for delivering oxygen to individuals with breathing-related disorders. Individuals whose oxygen concentration in their blood is lower than normal often require an oxygen concentrator to supplement the same.

Microtek **OXY**Flow 10M is designed by keeping maintenance costs in mind. For example, **OXY**Flow 10M has just two filters. The external filter can be changed in few minutes without special skills or tools and the internal micro disk filter is simply checked during routine maintenance procedures.

OXYFlow 10M concentrators are backed by value-added tools. From in-person and online training to financing options, you have what you need to succeed. Since Microtek offers a wide range of health care products and comprehensive support, we can be the source for many of your product needs.

OXYFlow 10M is compact, has a streamlined and integrated handle and weighs only 25 Kgs. Less weight means it is easier to move around and can lower shipping costs. Your patients will appreciate the compact, non-medical design of the **OXY**Flow 10M oxygen concentrator because it will fit right into their home environment. The unit is designed to be small, light, easy to transport and will fit into the trunk of a car. It has an easy-to-mount humidifier bottle connection and no patient filter.

Backed by our deep design knowledge, **OXY**Flow 10M is developed using only high-quality parts. With a recessed flow meter, metal cannula connector, strong plastic casing, proven sieve bed, and Pressure Swing Adsorption (PSA) technology, you may notice a reduction in repairs, complaints and unscheduled visits.



93% ±3% PURE OXYGEN





METAL BODY FOR RUGGED USE





DUAL FLOW FOR TWO USERS





BIG LCD DISPLAY









Scan the QR Code to View Demonstration Video & Download User Manual









OXYFlow 5 OXYGEN CONCENTRATOR

Microtek OXYFLOW 5 is an oxygen concentrator, a type of medical device used for delivering oxygen to individuals with breathing-related disorders. Individuals whose oxygen concentration in their blood is lower than normal often require an oxygen concentrator to supplement the same.

It is designed by keeping maintenance cost in mind and consists of just two filters. The external filters can be changed on few minutes without any special skill and the internal micro filter is simply checked during routine maintenance procedures.











COMPRESSOR NEBULIZER

YOUR TRUSTED HEALTH PARTNER









Nebulizer


Microtek Nebulizer is a Medical Device that changes Medication from liquid to mist so you can inhale it into your lungs. Microtek Nebulizer comes in a table top model. It is ideal for home nebulization, clinics and hospitals. Plug-in to an electronic outlet & the device is ready to use.

TECHNICAL DATA

- Liter Flow Range: ≥6.7L/min
- Average Nebulization Rate ≥0.25mL/min
- Sound Level: ≤65dB(A)
- Particle Size: 0.5–10 μm
- Operating Humidity Range: 15 to 80 % RH

- Operation Pressure Range: 9.5–19psi
- Compressor Pressure Range: 22–58psi
- Product size: 205*150*100mm
- Unit weight: 1.3kg



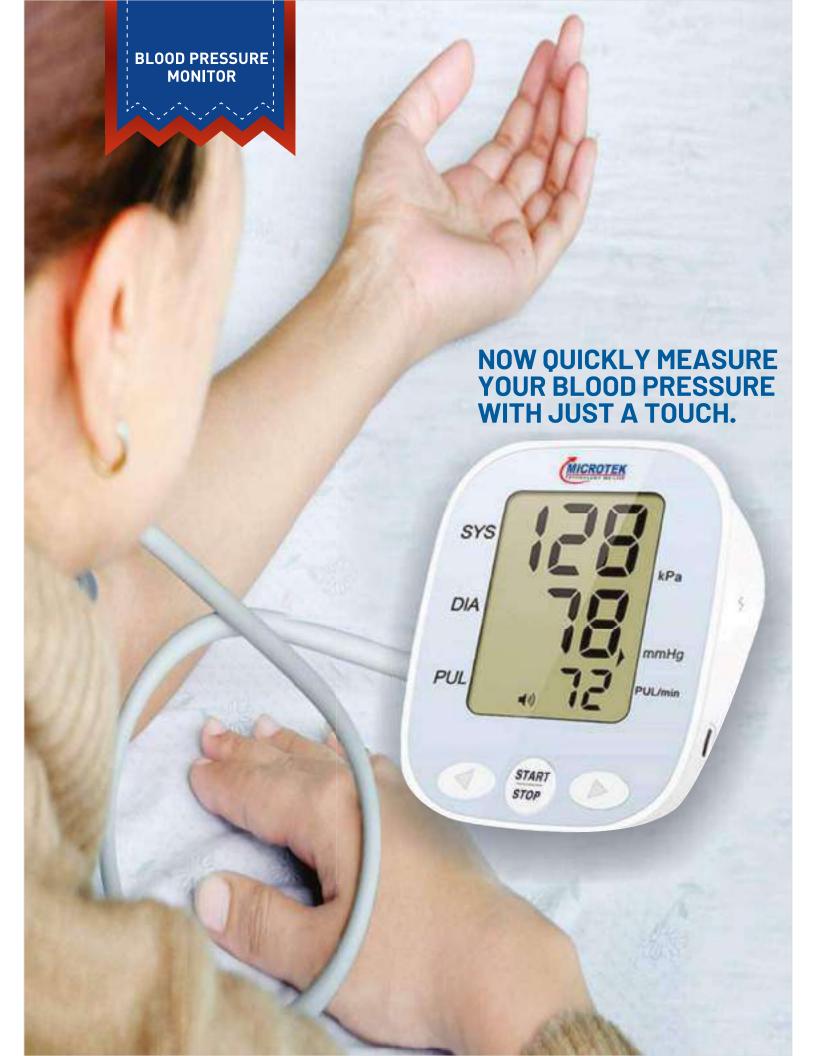









OPERATE WITH ADAPTER* VIA MICRO-USB TYPE-B CABLE* (DC5V/500mA)

POWER BANK

Blood Pressure Monitor

Microtek's Automatic Upper Arm Blood Pressure Monitor device uses an oscillometric method to measure the arterial blood pressure and pulse rate. The arm cuff is wrapped around the arm and automatically inflated by an air pump. The sensor of the device catches weak fluctuation of the pressure in the arm cuff produced by extension and contraction of the artery of the arm in response to each heartbeat. The amplitude of the pressure waves is measured and is displayed by a digital value. This device is easy-to-use and its accuracy will facilitate your daily blood pressure regimen.



INFLATION



MEASUREMENT



FAN-SHAPED ARM BAND



VOICE BROADCAST MEASUREMENT



ONE-BUTTON



IMPORTED



HD LARGE SCREEN



INTELLIGENT 2*192 SETS PRESSING OF MEMORY



MALFUNCTION REMINDING



POWER-OFF











Digital Thermometer

SALIENT **FEATURES**

• Measuring Range: 32°C-42.9°C / 90°F-109.9°F

• Accuracy: ±0.1°C / ±0.2°F

• Measurement Time: About 60 Secs

• Memory: Last reading can be seen

• Alarm: Beep sound on measurement complete, Low Temp., Over Temp. & Low Battery

· Auto Shut Off

• Power Supply: 1.5V Button Battery

• Non Mercury: (100% Safe)

Clinically Tested

• Easy-to-Read LCD Display

• Can be used in Oral Cavity, Recta & under the Armpit

NOTE: Before taking Oral, Axillary or Rectal temperature please read the enclosed pack insert.












Cover







Warranty

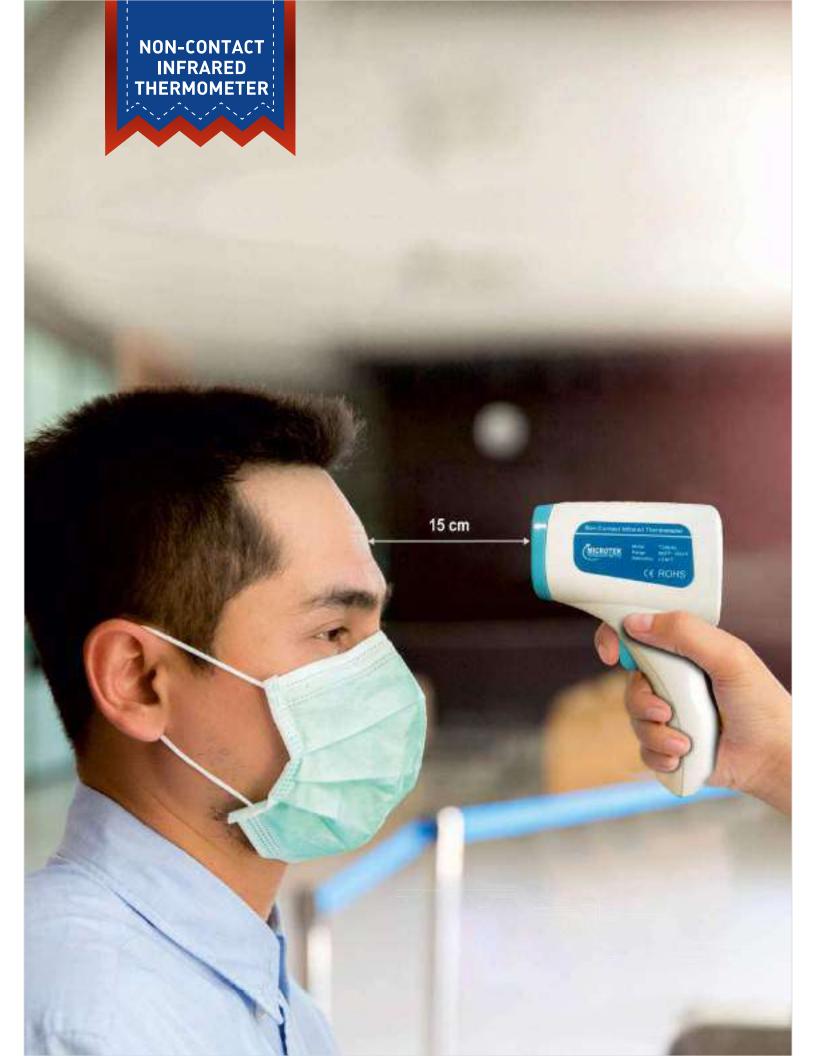








Non-Contact Infrared Thermometer

Advanced technology products that can measure the temperature of a human body by receiving the infrared energy emitted from the human body. It can also measure the temperature of a room and any object. It is ultra-fast, accurate and switchable with a fever alarm.







- ✓ Measurement Method
 - Non-Contact
- ✓ Measuring Distance
 1 to 15 cm*
- ✓ Measurement Range
 Temperature 32.0°C~ 42.9°C
 (89.6°F~109.2°F)
- ✓ Resolution 0.2°C / 0.36°F
- ✓ Working Conditions
 10.0°C~50.0°C (50°F~122°F) RH<85%
- ✓ Storage Conditions
 -20°C~55°C (-4°F~131°F) RH<95%
- ✓ Power
 2 AA (No.5) Alkaline Batteries DC-3V

- ✓ Power Dissipation
 - Shutdown State: <10uW Boot State: 30mW
- ✓ Low Voltage Indication <2.5V will be displayed as Low Voltage</p>
- ✓ Display Tricolor Backlit Screen
- ✓ Temperature of the Unit Degrees Celsius or Fahrenheit
- ✓ Automatic Shutdown Time Within 20 seconds
- ✓ **Dimensions** 170 x 110 x 50 mm
- ✓ **Net Weight** 105 Gms



FINGERTIP PULSE OXIMETER

NOW MEASURE YOUR PULSE RATE AND OXYGEN LEVEL, ANYTIME, ANYWHERE.









Finger Pulse Oximeter

A quick, simple and accurate way to check Pulse Rate, Blood Oxygen Saturation Levels and Perfusion Index. The comfortable silicon padded finger clamp with a simple one-button design allows for easy operation. A small portable size makes it convenient to use and carry. It is an ideal way to monitor the health status at home, especially during these COVID-19 times where regular monitoring of the patient is vital.







ACCURATE & RELIABLE RESULTS

QUICK & EASY RESULTS

SUITABLE FOR ALL

DUAL COLOR OLED DISPLAY








WE HELP YOU STAY CONNECTED

So that your work, home and life run safe, secure and uninterrupted, our range of wires and cables offers an extensive variety. Whether it's low-leakage or flame retardant or halogen, whether for something as small as a home appliance or something as complex as a telephone switchboard, we have it all covered.

- Lead Free Flame Retardant (LFFR)
- Flame Retardant Low Smoke & Halogen (FRLSH)
- Zero Halogen Low Smoke (ZHLS)
- Three Core Flat Submersible Cables
- Multi-core Round Flexible Cables
- Co-Axial TV Cables
- Telephone Switchboard Cable
- LAN Cables
- CCTV Cables
- Speaker Cables
- Solar Cables



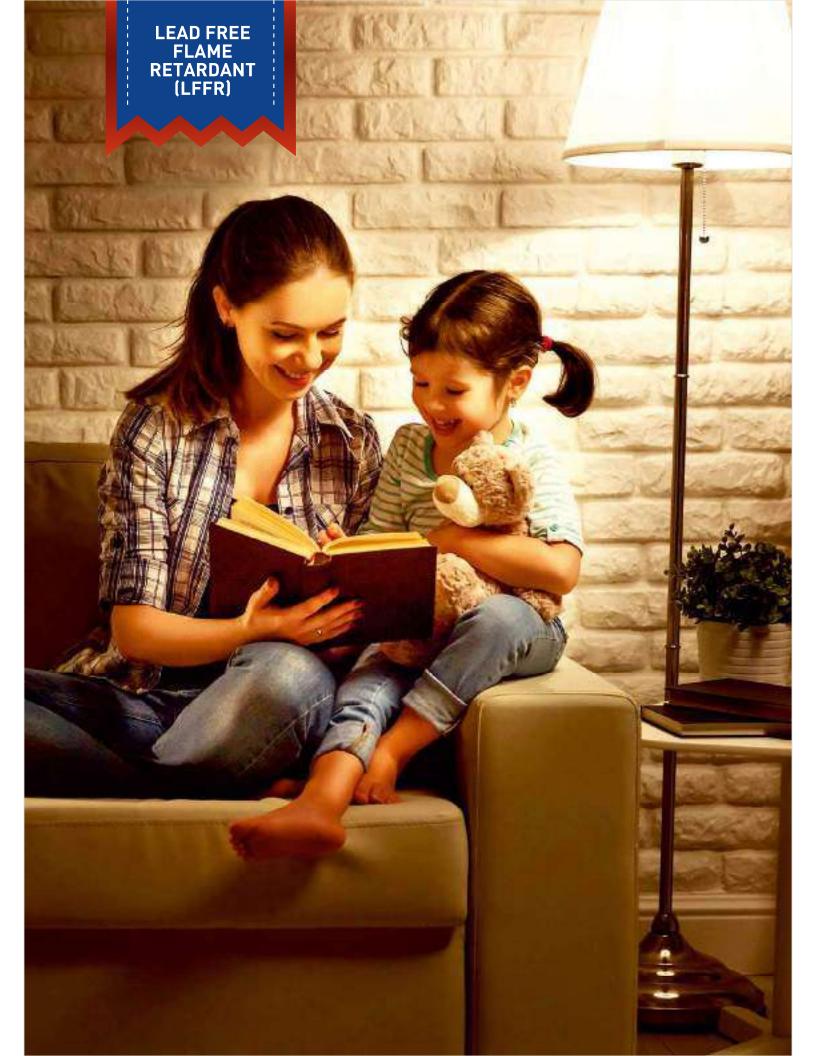






Natural PVC

Multistrand Flexible Copper Conductor



Lead Free Flame Retardant (LFFR)

LFFR wires are made of no-chemical Lead Free PVC insulation that ensures that they are safe for the environment. Its flame retardant property elevates the oxygen index which prevents the fire from spreading. They are used for internal electrification and power supply to all electrically connected equipment.

Note: Available in 90 meters in carton packing & 180 meters project length

**Current Rating (Amp.) at 20 °C (as per IS-3961:1968-Part-II)

*Conductor Shall be class-5 as per IS-8130:2013.

Conductor resistance as per IS-8130:2013 is the governing criteria

Conductor: Plain annealed copper conductor as

per IS-8130:2013

Insulation : Primary - Natural LF PVC with FR property

Secondary - Skin colour coated LF PVC with


FR property

Colour : Red/Black/Blue/Yellow/Green













Skin Colour PVC

Natural PVC

Multistrand Flexible
Copper Conductor

Flame Retardant Low Smoke & Halogen Wires

For internal electrification in commercial buildings with restricted ventilation

• High oxygen Index

• Self-Extinguishing Property


Conductor : Plain annealed copper conductor as per IS-8130:2013
Insulation : Unicolour FRLS-H PVC with one longitudinal line"


Colour : Red/Black/Blue/Yellow/Green

Any other colour on specific request can also be supplied. Current Rating (Amp.) at 20 °C (as per IS-3961:1968-Part-II)

Available Range: 1.0 Sq. mm to 6.0 Sq. mm



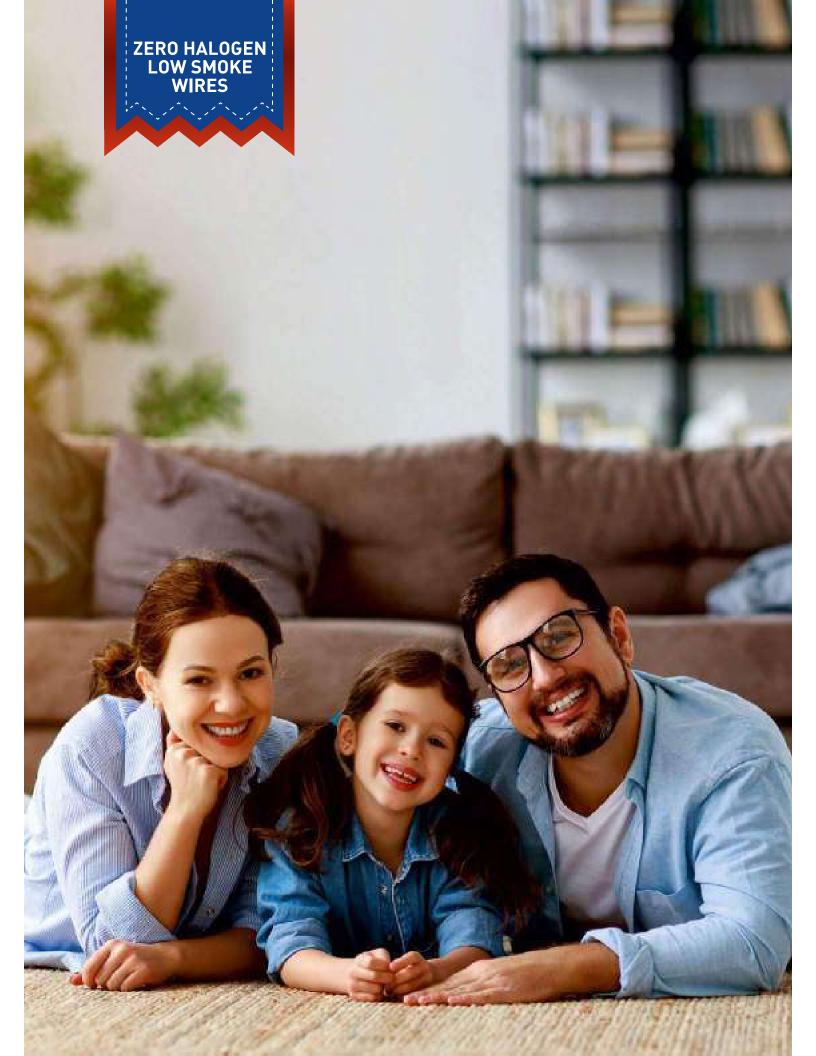








Multistrand Flexible Copper Conductor



Zero Halogen Low Smoke Wires

For internal electrification and power supply to all electrically connected equipment

• Non-Toxic

• Environment-Friendly

Conductor : Plain annealed copper conductor as

per IS-8130:2013

Insulation : Unicolour ZHLS polymaric Insulation

Colour : Red/Black/Blue/Yellow/Green

Any other colour on specific request can also

be supplied.


*Current Rating (Amp.) at 20 °C (as per


IS-3961:1968-Part-II)

Available Range: 1.0 Sq. mm to 6.0 Sq. mm






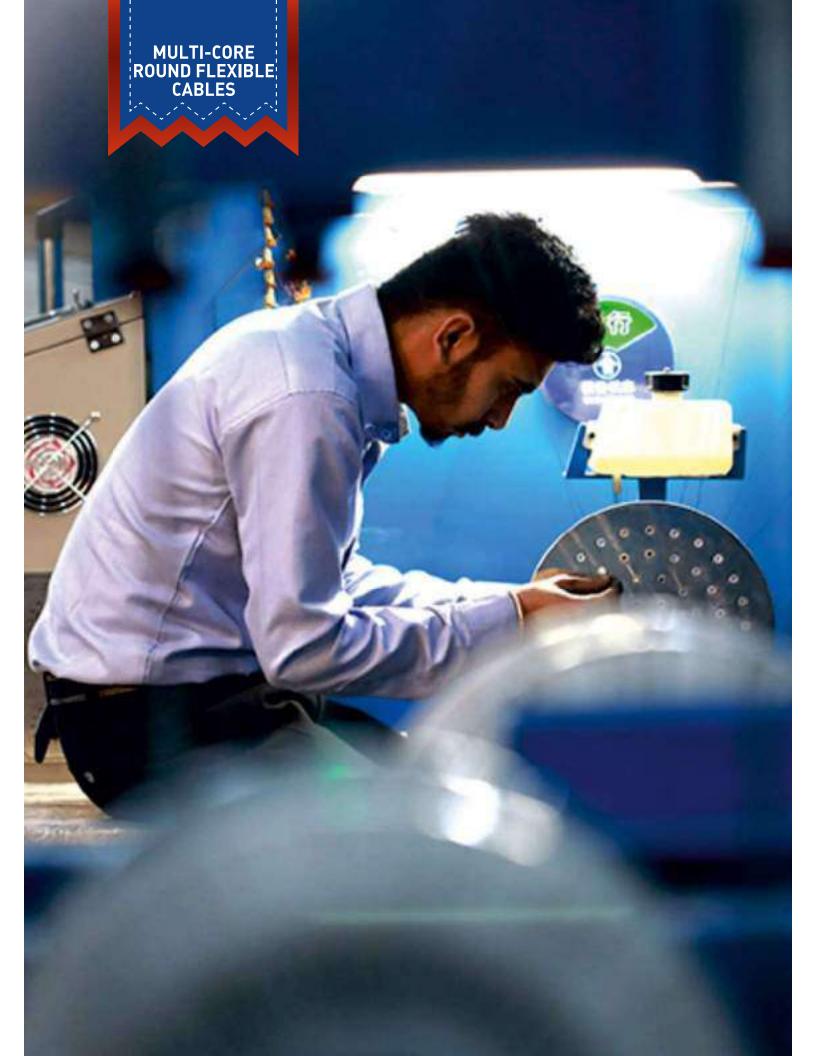









Multi-Core Round Flexible Cables

These cables are ideal for internal and external electrification and power supply for a wide range of industrial as well as domestic applications.

Note: Available in 100 meters length with black outer sheath & in bigger packing on request. Any colour on specific request can be supplied, in economical run.

Conductor resistance as per IS-8130:2013 is the governing criteria.

Conductor shall be of Class-V as per IS-8130:2013

Core Identification:


2 CORE: Red & Black


3 CORE: Red, Black & Yellow with Green line


4 CORE: Red, Yellow, Blue & Yellow with Green line

Available Range: 0.5 Sq. mm to 16.0 Sq. mm






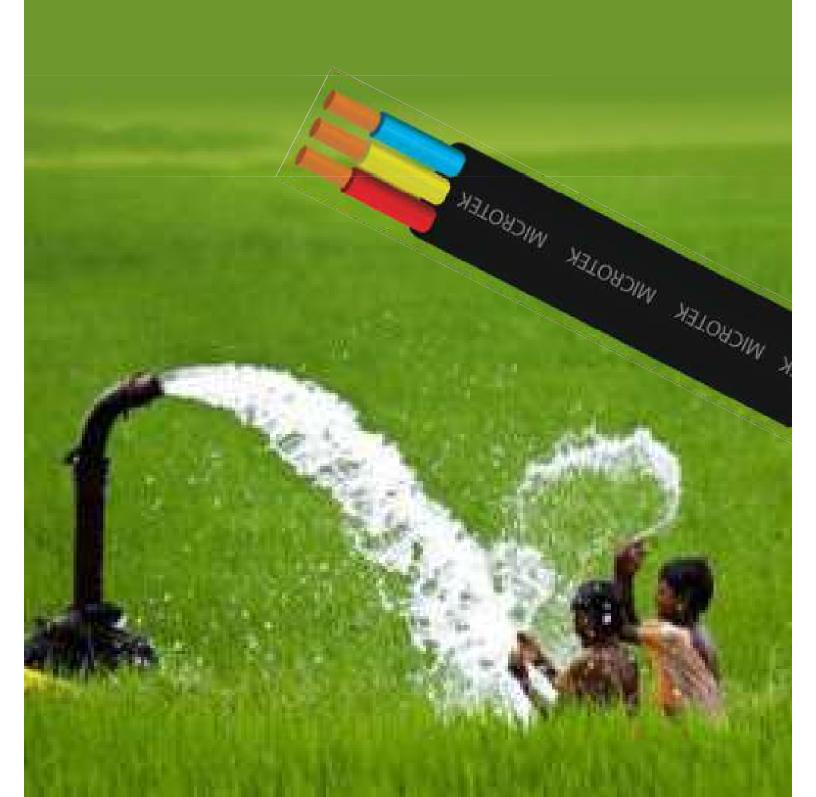







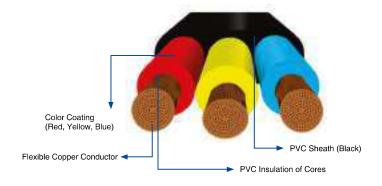

Three Core Flat Submersible Cables

For electrification and power supply in underground, under-water or on a wet surface

- Highly Abrasion Resistant
- Excellent Insulation Properties

Note: Available in $500 \pm 5\%$ meters packing in drums. Also available in 100 meters packing on request.


Conductor resistance as per IS:8130 is the governing criteria.

Conductor shall be of Class V as per IS-8130:2013.

Available Range: 1.50 Sq. mm to 35.00 Sq. mm












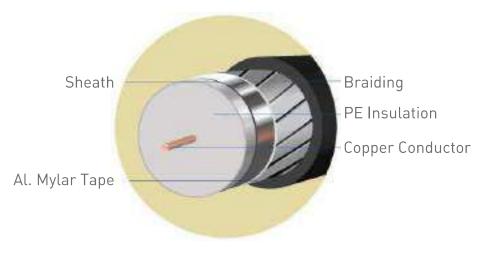

Co-Axial TV Cables

The Co-Axial TV cables are our solid annealed bare copper cables that surpass the highest quality standards. They are eco-friendly, safe, long lasting and fire retardant. They provide high-quality picture and are not affected by weather which makes them ideal to use for internal & external electrification and power supply in cable TV operations, Computer networking etc.

Solid Annealed Bare Copper Safe & Reliable Fire Retardant Safe For Environment


Size Available: RG-59, RG-6, RG-11














The Telephone Cables are made in conformity with TEC regulations. The high-class insulation adds to its longevity and stability properties. Its staggered layers of twisted wires ensure minimum crosstalk. Sizing and processing of conductor and insulated cores are done in a precisely controlled manner to have optimum values of capacitance, capacitance unbalances, image and cross talk attenuation, and characteristic impendence. They are used for internal & external electrification and power supply in all equipment involving telephones. High-Class Insulation Long Lasting & Stable Twisted Pair For Min. Cross Talk High Grade Copper


Features

- Exceptional material properties and cable design
- High ACR values-providing low BER (Bit Error-Rate) Exceeds cat 6 Best transmission performance.
- Extremely high pair-balance-providing excellent EMC (Electromagnetic compatibility)
- Maximum noise immunity. ISO/IEC 11801 Class E. UL-94V0 rated Plastics.
- Longer Cable segment Length. High speed data access
- Total end-to-end horizontal cabling solution
- Backwards compatible with Microtek Category 6 systems ensuring support for legacy applications
- Unshielded Twisted Cable
- Cable supports frequencies up to 250 MHZ.
- Cable supports data transfer speeds up to 1000Mbps Gigabit
- Available in 100 Mtr coil/305Mtr Box packaging

Configuration: 1p, 2p, 3p, 4p, 5p, 10p, 20p



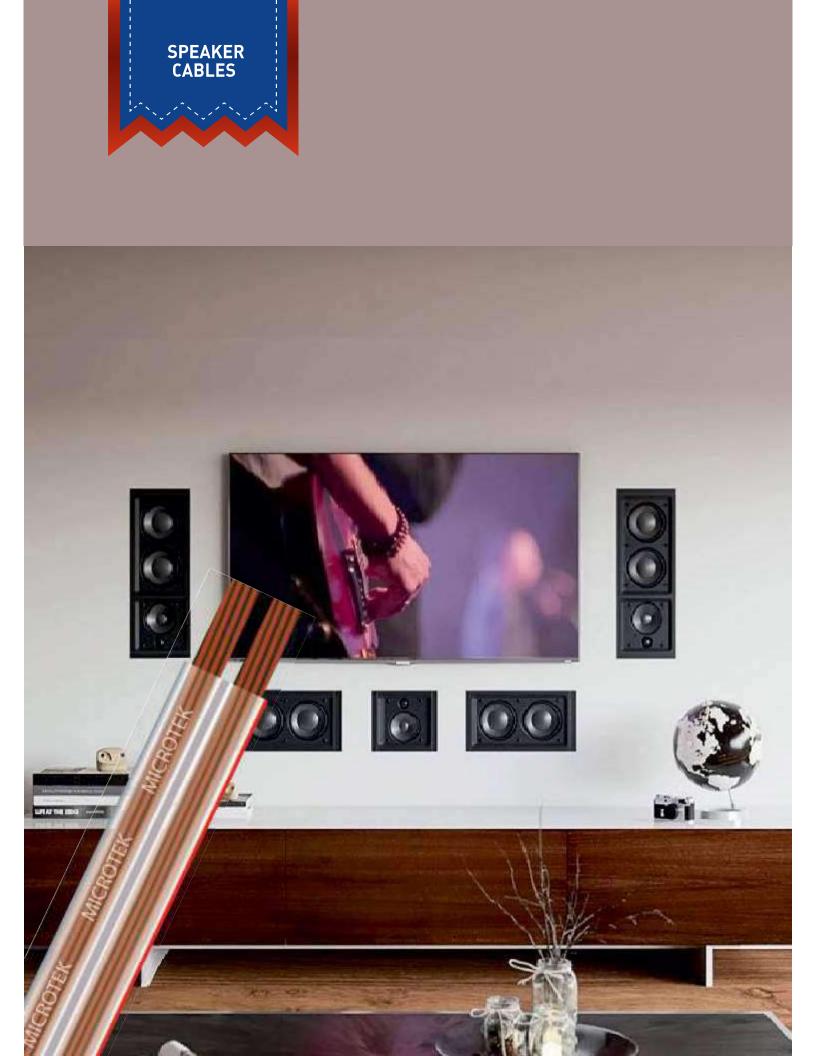










Speaker Cable


Speaker Cables are used to make connection between loudspeaker and audio amplifiers within various sound instruments. In today's constructions, the new building code (like for Airports, Railway Platforms, Auditoriums, Offices, High-rise Apartments and Hospitals etc.), installation of speaker cables ensure a clear and distortion free voice with very low dB loss.

Construction Details: The twin parallel cable have the following construction with different coloring of insulation.


Size Available: 1 Sq. mm to 2.5 Sq. mm



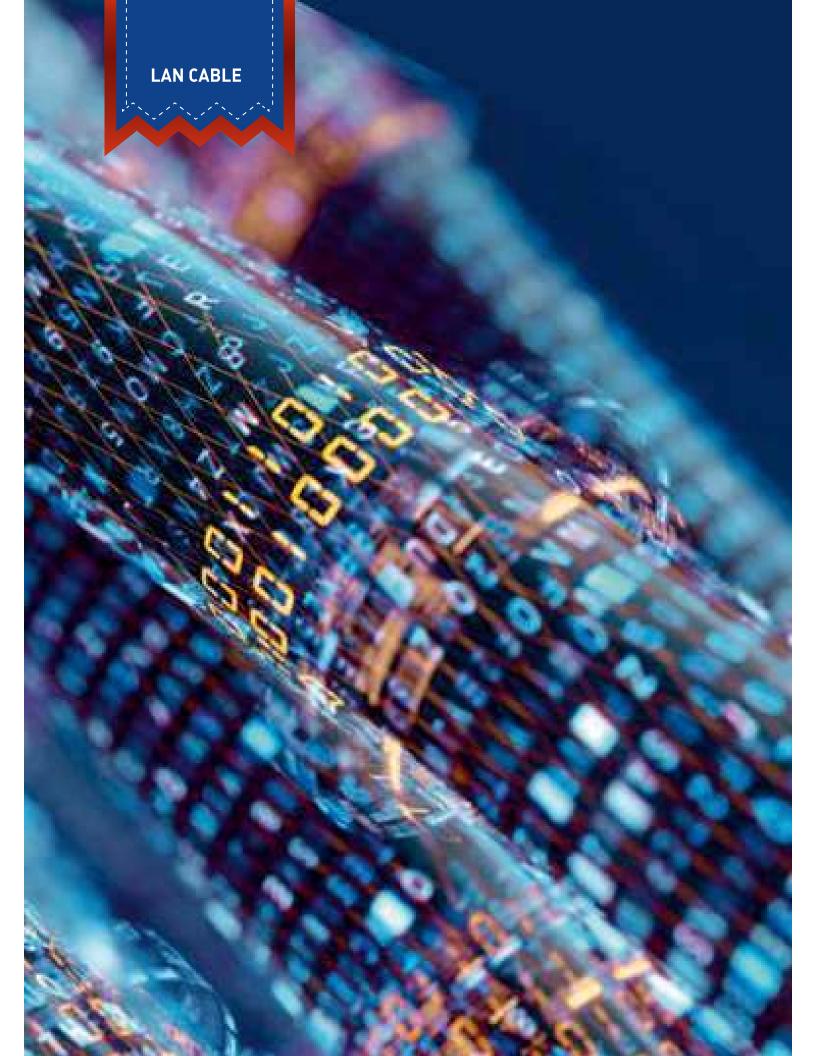





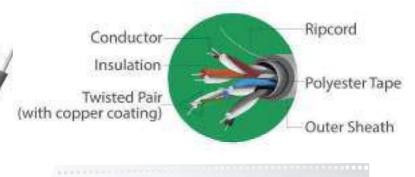

CAT 6 / CAT5E Cable

Microtek Networking Cables are bound to give great internet speed.

The cables are verified to the performance requirements of ISO/IEC 11801, TIA/EIA 568C.2.

Unshielded twisted pair (UTP) cable is used in many homes and business-based Ethernet networks.

We ensure to maintain high standards by individually twisting each pair to prevent interference from other devices on the network. All the cables pass fluke test and have high ACR value, EMC, and noise immunity.

They are used for networking and accessing highspeed networks and internet data.

Features

- Exceptional material properties and cable design
- High ACR values-providing low BER (Bit Error-Rate) Exceeds cat 6 Best transmission performance.
- Extremely high pair-balance-providing excellent EMC (Electromagnetic compatibility)
- Maximum noise immunity. ISO/IEC 11801 Class E. UL-94V0 rated Plastics.
- Longer Cable segment Length. High speed data access
- Total end-to-end horizontal cabling solution







EXPERIENCE THE CONNECTIVITY & ACCESSIBILITY AT ITS BEST.



MINIMUM DISTORTION OR ATTENUATION



OPTIMIZE
VIDEO
OUALITY




SOLID ANNEALED BARE COPPER



STRONG SIGNAL STRENGTH WITH NO REFLECTION










CCTV Cable

Microtek CCTV Cables are offered in two types namely 4+1 CCTV Cables and 3+1 CCTV Cable. These are designed to optimize the quality of video signals, which are transmitted through the Coaxial cable in the CCTV. Top most quality of construction of coaxial cable in Microtek CCTV cables ensures distortion free video signals. Thus, providing a clear picture over complete low frequency bandwidth of transmission in such applications.

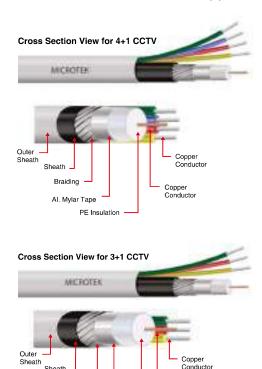

Copper Conductor


Two Types : 4+1 CCTV Cable and 3+1 CCTV Cable

PE Insulation

Braiding


Al. Mylar Tape









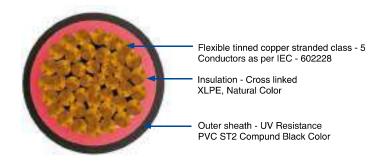


Solar Cable

Solar Cables are intended for use in photovoltaic power supply systems and similar applications as free hanging, movable, fixed installation and buried in ground in constructional covered systems. These cables can be used indoor, outdoor and explosive areas, in industry and agriculture. They are suitable for applications in equipment with protective insulation.

Size Available: 2.50 Sq. mm to 25 Sq. mm



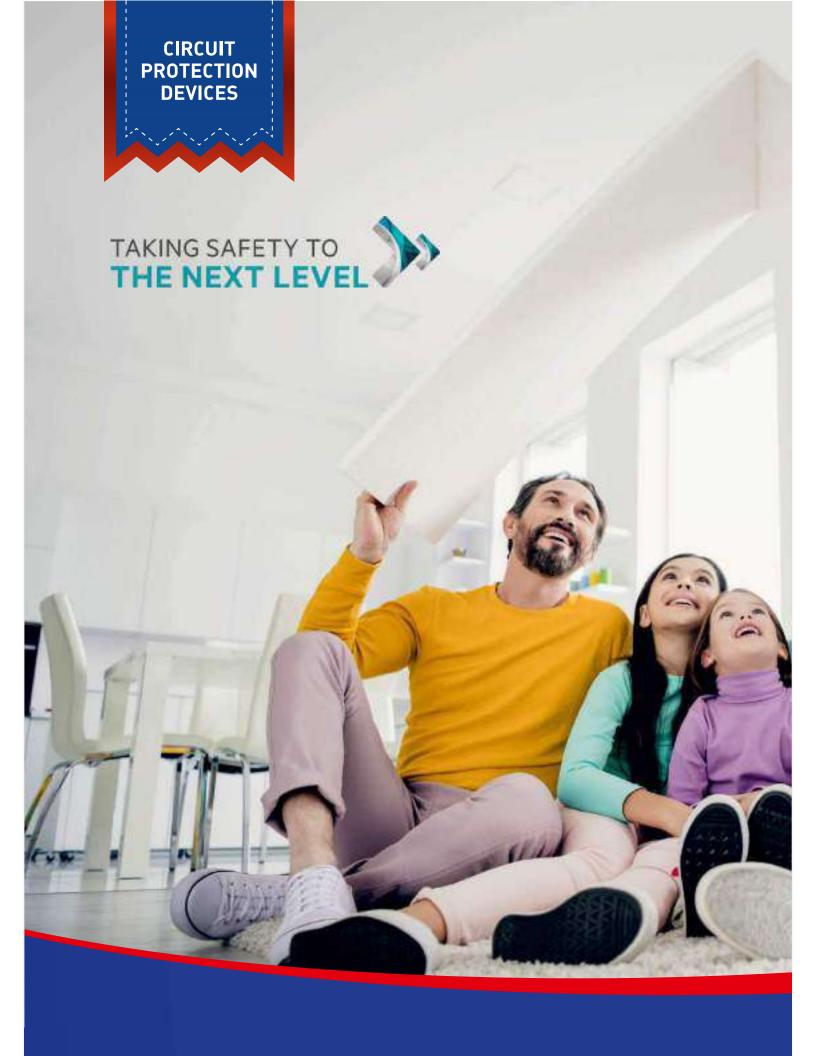




YOUR SAFETY IS OUR PRIORITY


Evolving electrical distribution and protection needs across sectors has raised the significance continuity of service, enhanced operational safety, operating cost and convenience tremendously.

We at Microtek design every product keeping safety as the priority. All of our products are made using cutting-edge technology to ensure high level performance and safety. Microtek Miniature Circuit Breaker, Isolator, Residual Current Circuit Breaker, MCB Changeovers, Distribution Board, Offload Changeover Switches, Rewirable Fuse Switch Units and Mini DP MCB with enclosure ensure the flexible functionality and offer super aesthetic to the solution in regards to the ever changing need of electrical distribution in different sectors like residential, commercial and industrial. They are designed to proved improved operational safety, better continuity of service, lower operating cost and greater convenience.

- Miniature Circuit Breaker
- Isolator
- Residual Current Circuit Breaker
- Distribution Board



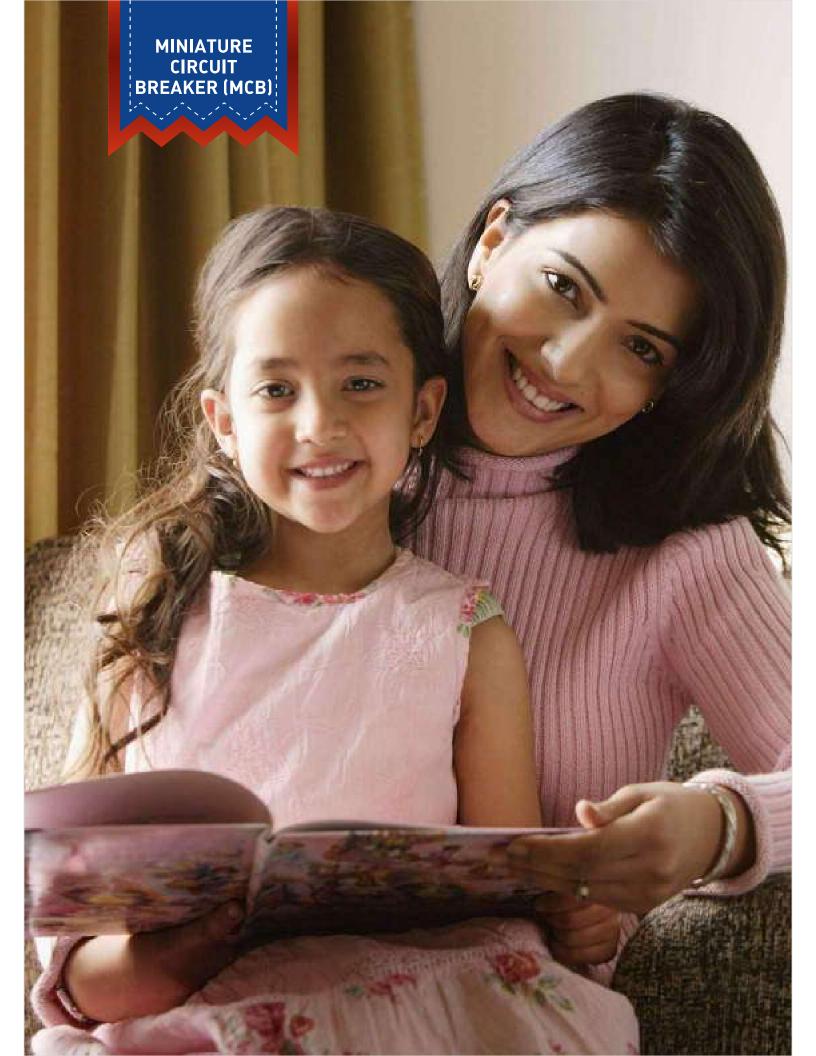









Miniature Circuit Breaker (MCB)

The solution to the ever-changing need for electrical distribution in different sectors like residential, commercial and industrial. They are designed to provide improved operational safety, better continuity of service, lower operational safetyand greater convenience.

- State of the art design
- Contact Indicator Window
- Dual Position Clamp
- Exceptional Endurance

- Breaking Capacity
- Trip-Free Mechanism
- Bi Connect Terminals

Range : 6A to 63A - 'C' Curve

Execution : Single Pole (SP), Single Pole & Neutral (SPN), Double Pole (DP), Three Pole (TP),

Three Pole & Neutral (TPN) & Four Pole (FP)

Specification : IS / IEC 60898-1











High-grade switch disconnectors used generally at both ends of circuit breaker. They make, carry and break currents under normal circuit conditions including overload or specific abnormal circuit conditions such as short circuit for a specified time.

• State-of-the-art-Design

• Bi Connect Terminals

• Dual Position Clamp

• Exceptional Endurance

• Protection IP-20

• Air Flow Channel


Range : 40A, 63A, 100A

Execution : Double Pole (DP), Three Pole (TP) & Four Pole (FP)

Specification : IS / IEC 60947-3













Residual Current Circuit Breaker (RCCB)

A safety solution device designed to protect the consumers from fatal electric shocks and prevent fire caused by earth faults. The RCCB is a mechanical switching device that carries and breaks current under normal service conditions and causes the opening of the contacts when the leakage current attains a given value under specified conditions. The high-quality insulation adds to the safety of consumer.

- Simple and robust operating mechanism
- On/Off Printing on Knob for contact position indication.
- Dual Termination of Bus Bar as well as cable connection
- Range : 25A, 40A & 63A Type 'AC'

Execution : Double Pole (DP) & Four Pole (FP)
Specification : IS 12640 Part 1, IEC/EN 61008-1


Sensitivity: 30mA,100mA,300mA

Advance neutral

- Trip Indication Window
- Protection IP-20

 Superior Sensitivity and Rapid Operating Mechanism









Distribution Board

These are designed keeping in mind the performance and the looks. They ensure proper load distributed to all the devices. These elegantly designed and compliment the decor of your house and offices.

- Modern Design
- Box insertion Marks
- Durable Sliding Knob

- Key Type Mounting Holes
- Circuit Identification Labels
- Detachable Gland Plates


Range : SPN, TPN, VTPN, CONSUMER DB, METAL/PLASTIC Encl.

Execution : Single Door, Double Door

Specification : IS 13032


IS 8623



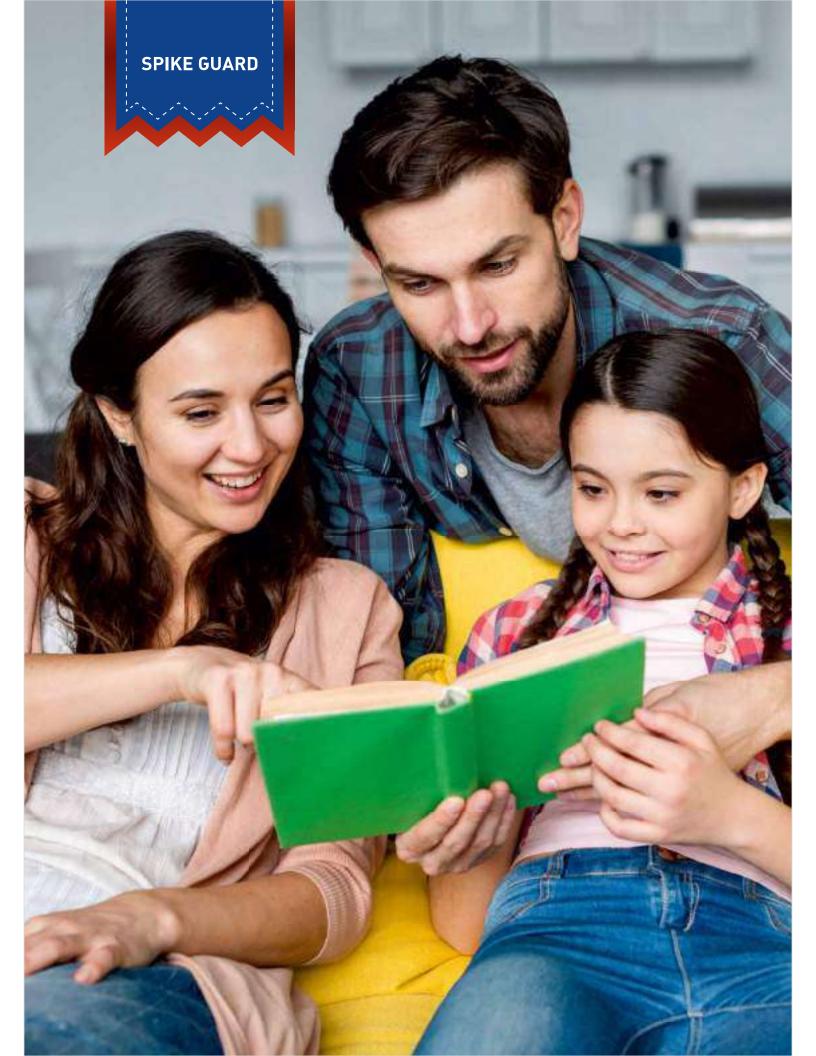





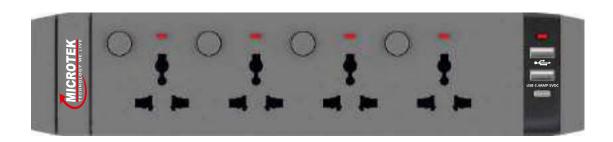

Spike Guard

Microtek's spike guard is an appliance designed to protect electrical devices from voltage spikes. It comes with auto resettable overload protection, voltage surge protection and a cable length of 1.5 meter & 2.0 meter.



6A' 0'5SQMM WIRES' 1500W, 240V AC

Heavy Duty Spike Guards for wide applications in multiple appliances



ON/OFF SWITCH

Provided with main and individual On/Off switches for every connection



SURGE PROTECTION

High Power MOV protects appliances from any Voltage Surges



OVERLOAD PROTECTION

Replaceable Fuse for catching any current overload in circuit & ensuring safety of connected devices



CHILD SAFE SHUTTURED UNIVERSAL SOCKETS

Wide usage compatible pins with shutter to safeguard children



LED LIGHT'S

Clear LED Indications for Fuse Blown identifications and circuit position.



HEAVY DUTY BRASS CONNECTORS



USB CHARGING

2.4A, 5V DC USB port with extra MOV protection for faster and safer charging

AVAILABLE MODELS -

- 4 UNIVERSAL SHUTTERED SOCKETS + 1 SWITCH WITH INDICATOR
- 4 UNIVERSAL SHUTTERED SOCKETS + 4 SWITCHES WITH INDICATORS
- 4 UNIVERSAL SHUTTERED SOCKETS + 1 SWITCH WITH INDICATOR + 2 USB CHARGERS + 1 TYPE 'C' CHARGER
- 4 UNIVERSAL SHUTTERED SOCKETS + 4 SWITCH WITH INDICATOR + 2 USB CHARGERS + 1 TYPE 'C' CHARGER









Multi Plug Adaptor

Microtek's multi-plug adapter is made of high-quality polycarbonate that ensures it is not damaged very easily while an amazing power output makes the adapter an amazing source of power consumption for all your devices and appliances.



Universal Socket



Fire Retardent Poycarbonate Material



LED Indicator



6A (Max) 240V AC, 50Hz




Nickle Plated Brass Pins



Sleek & Compact Design



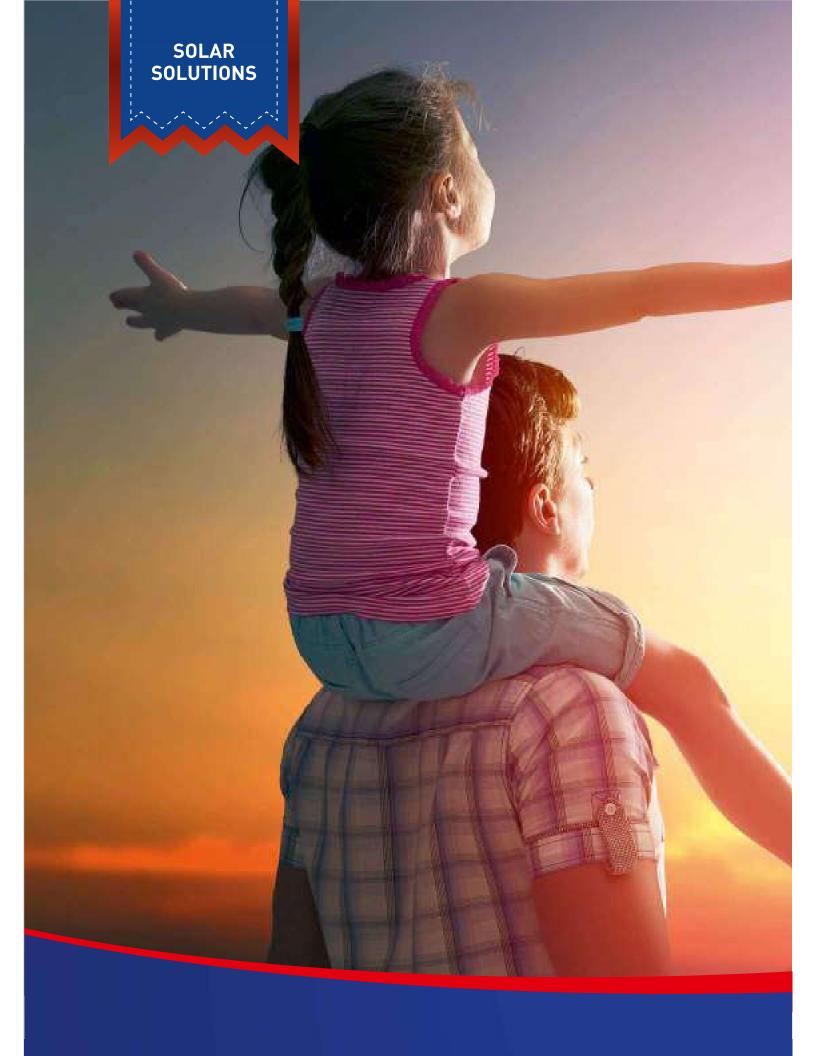




POWER OF THE SUN

The sun is the natural source of solar energy. Our Solar range provides access to this free source of solar energy which is green, reliable, and pollution free. With energy conservation being the need of the hour, solar-energy based applications are like essentials and we make sure to get them to you.

- OFF Grid Solar Solutions
- ON Grid Solar Solutions
- Hybrid Solar Solutions
- Solar Conversion Kit
- Solar Batteries
- Solar PV Modules
- Solar Power Generating System
- Zero Export Kit for Grid Tied Solutions

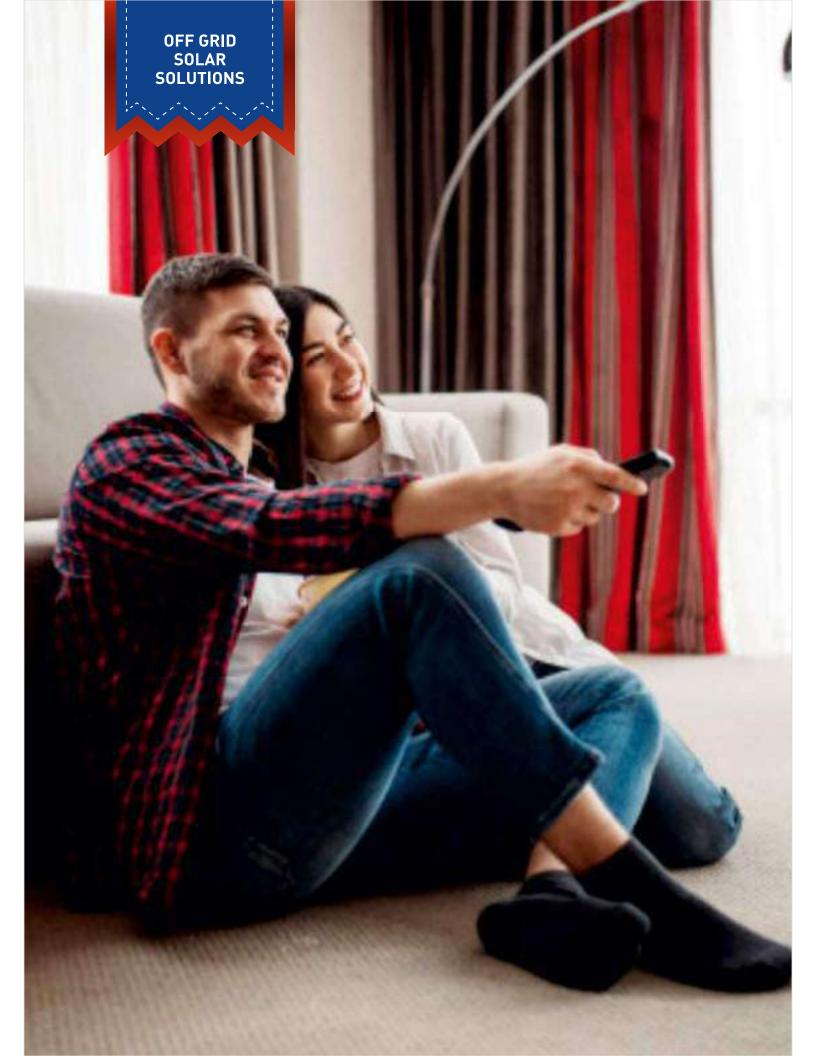







Solar MPPT PCU

$High\ Efficiency\ Microtek\ Solar\ TRUE\ MPPT\ PCU\ are\ based\ on\ DSP\ technology.$

- Pure DSP Sine Wave Technology.
- User Friendly Smart Multicolor LCD Display.
- State of the art and advanced MPPT Technology ensures 30% More Energy generation from Solar PV.
- Advance Real Time Clock Technology ensures optimum Saving of Electricity bill.
- Smart LCD displays total solar energy generation (in KWH).

- Provision for setting Critical Parameters of Solar thru Smart Front Panel
- Smart logic built in Software to maintain Battery Gravity and Enhance Battery Life.
- Battery Types Support : Tubular, SMF and Flat Plate.
- Remote monitoring thru Wi-Fi /LAN/GPRS (optional feature).

AVAILABLE MODELS - 7.5KVA/96V & 10KVA/120V







SOLAR PCU MPPT 5KVA

- Advanced DSP Based Technology.
- Adaptive MPPT Logic for excellent power generation.
- Pure Sinewave Output.
- User Friendly LCD Display.
- Remote monitoring (Optional Feature).
- State of the art and advanced DSP based MPPT Technology ensures 30% More Energy generation from Solar PV.
- Advanced Charge Sharing ensures optimum Saving of Electricity.
- ECO mode / Grid mode / Mains mode selection.

AVAILABLE MODELS - 5KVA/48V









Solar PWM PCU

Microtek SOLAR PCU is designed using latest state-of-the-art Technology for Better Performance and High Reliability.

It is Integrated with in-built 35Amp Smart Solar Management Unit.

The Solar Sinewave Technology used, enhances the life of the battery and minimum effort has to be put for maintenance.

- Micro-Controller DSPIC Based Intelligent Control Design.
- Dual Charging, Mains Mode and Solar Mode.(Solar Panel upto 600W-12V model).
- Pure Sine Wave Regulated Output.
- Auto Reset Feature.

- Smart PWM Controlled multistage ATM (Automatic Trickle Mode) Charging.
- LCD and Graphical Display Indications (Status & Fault).
- Smart and Faster Overload Sense and Short Circuit Protection.
- Mains Input Voltage Range Selection.

AVAILABLE MODELS - 1235 (12V), 1435 (12V), 2035 (24V) & 2335 (24V)







Hi-End Solar PWM PCU

Pure Sinewave Solar PCU PWM are based on DSP technology.

- State of the art Pure Sinewave technology.
- Smart Real Time Clock solar selection to maximise money saving
- User Friendly solar selection switch to save power.
- Battery charges even at 90V low voltage.
- Smart LCD displays total solar energy generation (in KWH).
- Battery Types support : Tubular, SMF, Flat Plate.
- Remote monitoring thru Wi-Fi /LAN/GPRS (optional feature).

AVAILABLE MODELS - 2550/24V & 4050/48V









Polycrystalline PV Modules

Positive Power Tolerance Modules with highly classified A-Grade Solar Cells for lesser degradation and high energy and high conversion efficiency based on leading innovative photo voltaic technologies.

- Positive Power Tolerance Modules.
- Highly Classified A-Grade Solar Cells for Lesser Degradation and High Energy.
- Micro Crack Free Panels-100% EL Tested Before and After Lamination.
- Excellent Performance in Low Light.
- High Conversion Efficiency based on Leading Innovative Photo Voltaic Technologies.
- PID Free Modules with Long Term Reliability.
- Eco-Friendly.
- Excellent Performance in Low Light.

AVAİLABLE MODELS - 40W/12V, 50W/12V, 75W/12V, 100W/12V, 165W/12V, 270W/24V, 330W/24V







Mono Perc PV Modules

Positive Power Tolerance Modules with highly classified A-Grade Solar Cells for lesser degradation and high energy and high conversion efficiency based on leading innovative photo voltaic technologies.

- High Performance Mono Perc Cell.
- Exceptional performance even under low light conditions.
- High conversion efficiency saves installation space.
- Manufactured with premium grade input materials.

AVAILABLE MODELS - 390W/24V







Hi-End SMU with LCD Display

MICROTEK Micro-Controlled based High Efficiency, PWM SOLAR MANAGEMENT UNIT (SMU) is best suited for Low-Power Solar Applications.

Solar Management Unit convert your Normal External Battery UPS/Inverter into Solar UPS/Inverter.

- User Friendly LCD Display.
- Highly Efficient PWM Charging, ensures More Battery Life and Improved Solar System Performance.
- Automatically recognizes Day & Night.
- Mosfet Switching System.
- Priority Load Sharing through Solar during daytime, thereby saving your mains electricity.
- Compatible with all type of Batteries: SMF/Flat Plate/Tubular.

AVAILABLE MODELS -LCD SMU 4850, 9650, 12050 & 18050









SMU with LCD Display


MICROTEK Micro-Controlled based High Efficiency, PWM SOLAR MANAGEMENT UNIT (SMU) is best suited for Low-Power Solar Applications.


Solar Management Unit convert your Normal External Battery UPS/Inverter into Solar UPS/Inverter.

- User Friendly LCD Display.
- Highly Efficient PWM Charging, ensures More Battery Life and Improved Solar System Performance.
- Automatically recognizes Day & Night.
- Mosfet Switching System.
- Priority Load Sharing through Solar during daytime, thereby saving your mains electricity.
- Compatible with all type of Batteries: SMF/Flat Plate/Tubular.

AVAILABLE MODELS - LCD SMU 1230, LCD SMU 1250, LCD SMU 2430 and LCD SMU 2450



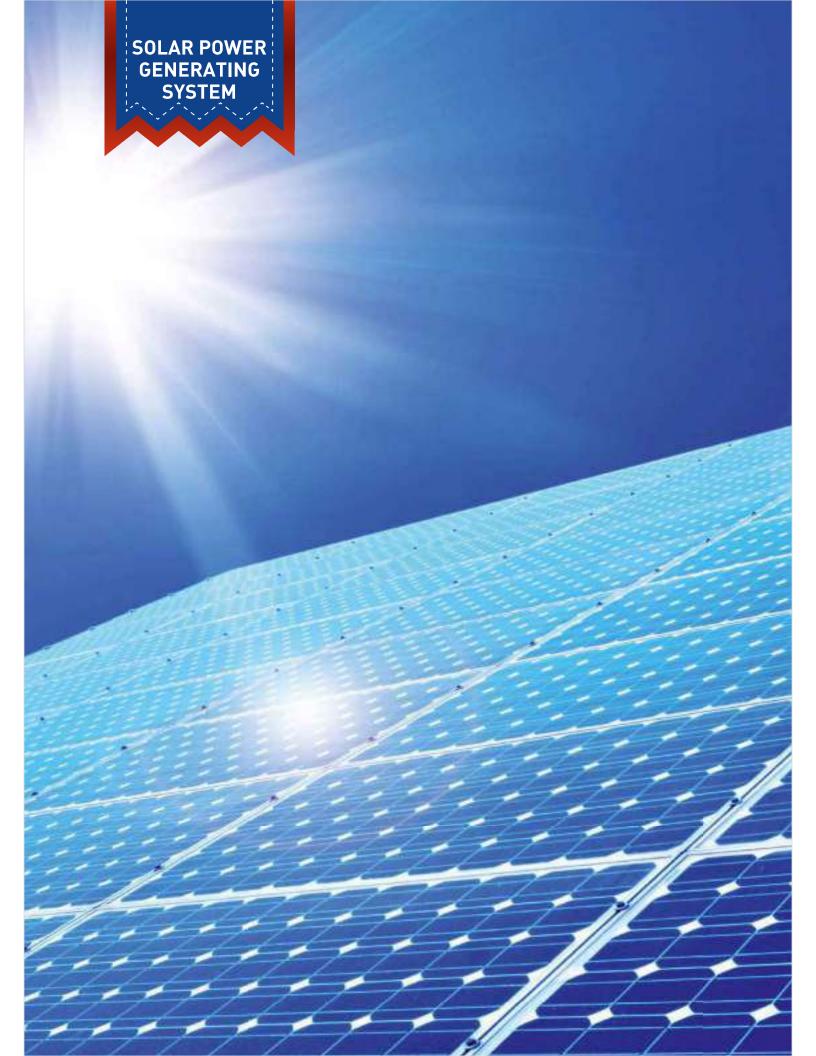





Solar Power Generating System

SOLAR ROOFTOP SOLUTIONS

STANDARD CAPACITY SOLUTIONS










HIGH CAPACITY SOLUTIONS












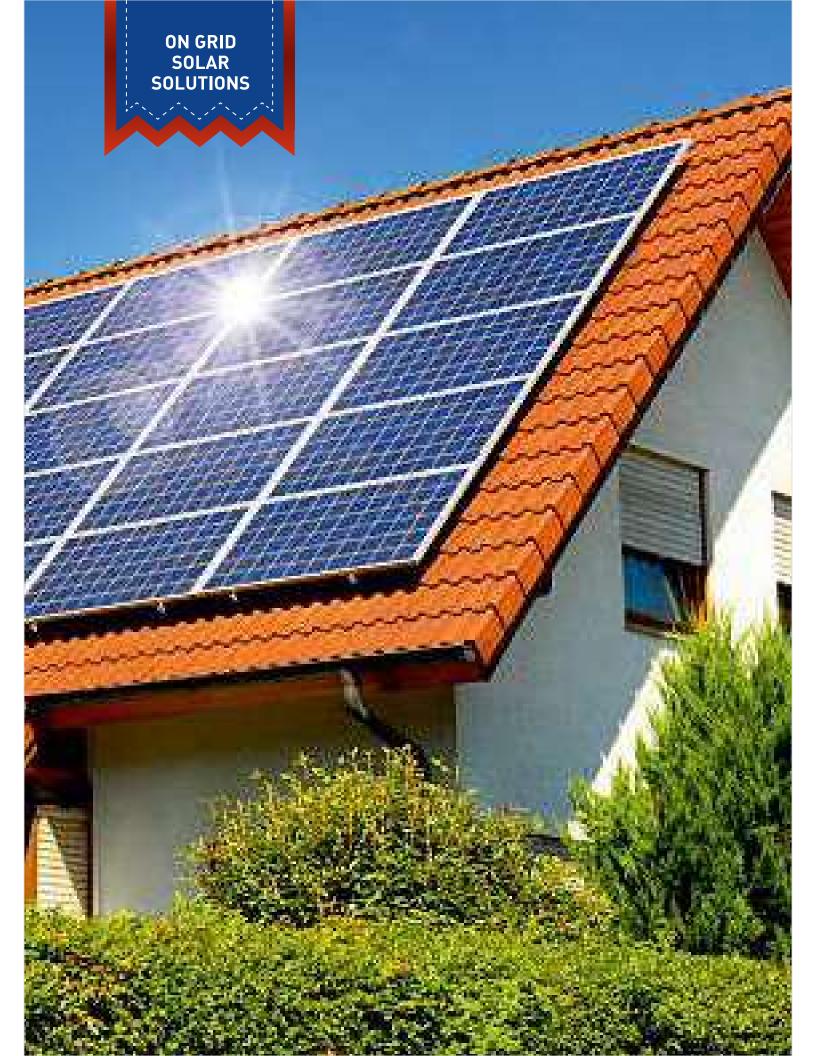







Grid-Tied Solar System

A system with Grid-Tie functionality, it is an MPPT Based Technology Grid Tie Wall mounted Solar System that converts solar energy into electricity. It exports excess generation of electricity from the solar to the Utility Grid in case of an active Net Metering Policy in State.


- Max 97% Efficiency, Real Time Precise
 MPPT algorithm for BEST
 Performance.
- Plug & Play Easy Installation & Maintenance, IP65 for Free Site Selection.
- 4" LCD Display, Interface Selection, RS485 for System Monitoring.
- Intelligent Grid Management, Reactive Power Capability & Self Power Reducer when Over Frequency. Remote Active/Reactive Power Limit Control.
- SD Card inside for Life Long Data Storage upto 25 Years.

Single Phase Models: GT 1KW, GT 2.2KW, GT 3.3KW, GT 4KW, GT 5KW

Three Phase Models: GT 5.5KW, GT 8.8KW, GT 11KW, GT 12KW, GT 15KW, GT 20KW,


GT 30KW, GT 40KW, GT 50KW



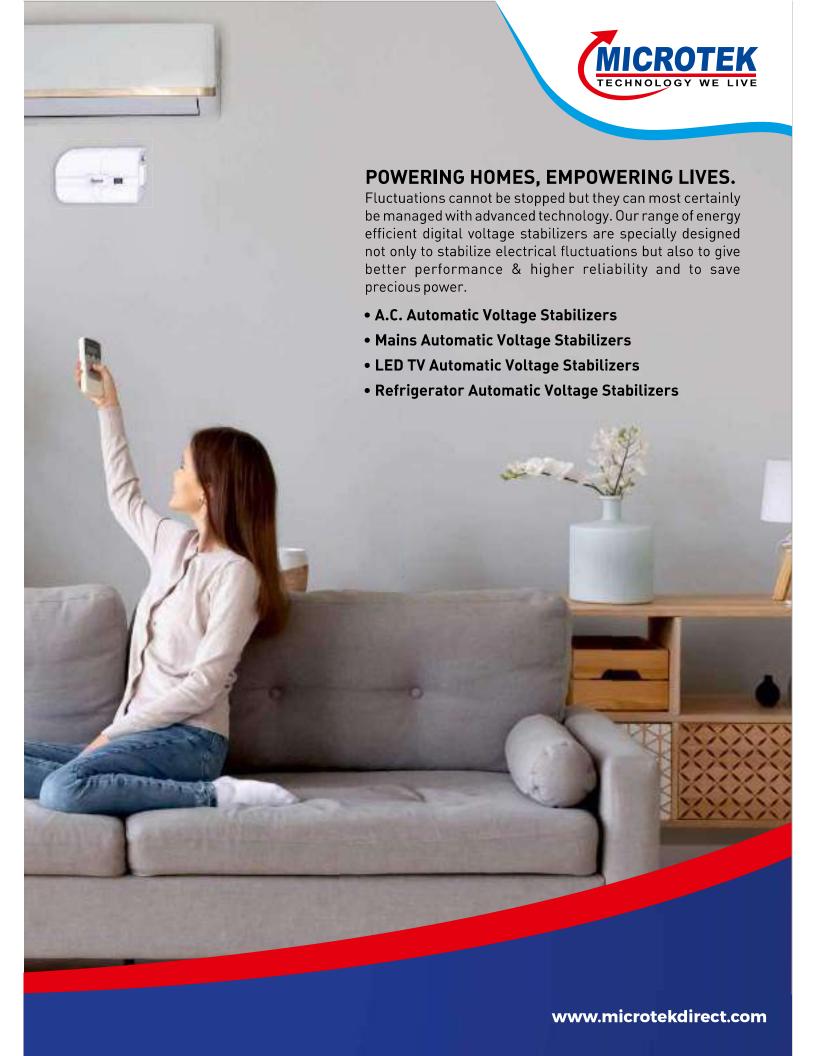



























Automatic Voltage Stabilizers for AC

A complete range of energy efficient Automatic Voltage Stabilizers for airconditioners with various working input ranges suitable for all kinds of power and voltage conditions. All Stabilizers for AC's also have a Smart Time Delay feature that gives breathing space & stabilizes the power supply, hence increasing the life of appliances.

Models with Copper Transformer				
PEARL MCU 4170+	170V-270V	Upto 1.5 ton	3 Years Onsite	
PEARL MCU 4150+	150V-280V	Upto 1.5 ton	3 Years Onsite	
PEARL MCU 4130+	130V-300V	Upto 1.5 ton	3 Years Onsite	
Models	Working Range	Applications	Warranty	
PEARL EM 4170+	170V-270V	Upto 1.5 ton	3 Years Onsite	
PEARL EM 4160+	160V-285V	Upto 1.5 ton	3 Years Onsite	
PEARL EM 4150+	150V-280V	Upto 1.5 ton	3 Years Onsite	
PEARL EM 4140+	140V-290V	Upto 1.5 ton	3 Years Onsite	
PEARL EM 4130+	130V-300V	Upto 1.5 ton	3 Years Onsite	
PEARL EM 4110	110V-300V	Upto 1.5 ton	3 Years Onsite	
PEARL EM 4090	90V-300V	Upto 1.5 ton	3 Years Onsite	
PEARL EM 5170+	170V-270V	Upto 2 ton	3 Years Onsite	
PEARL EM 5150+	150V-290V	Upto 2 ton	3 Years Onsite	
PEARL EM 5130+	130V-300V	Upto 2 ton	3 Years Onsite	
PEARL EM 5090	90V-300V	Upto 2 ton	3 Years Onsite	

For Air Conditioner					
Models	Working Range	Applications	Warranty		
SMART EM 4170+	170V-270V	Upto 1.5 ton	3 Years Onsite		
SMART EM 4160+	160V-285V	Upto 1.5 ton	3 Years Onsite		
SMART EM 4150+	150V-280V	Upto 1.5 ton	3 Years Onsite		
SMART EM 4140+	140V-290V	Upto 1.5 ton	3 Years Onsite		
SMART EM 4130+	130V-300V	Upto 1.5 ton	3 Years Onsite		
SMART EM 5170+	150V-270V	Upto 2 ton	3 Years Onsite		
SMART EM 5150+	150V-290V	Upto 2 ton	3 Years Onsite		
SMART EM 5130+	130V-300V	Upto 2 ton	3 Years Onsite		






















Automatic Voltage Stabilizers for Mains

Range of energy efficient Digital Voltage Stabilizers for Mains with Output Load Current Carrying Capacity from 6 A to 30 A, suitable for all kinds of power and voltage conditions. No need to install separate Stabilizers for appliances after installing in Mains. They have a separate MCB for bypassing the unit if required.

For Mains					
Models	Working Range	Applications	Warranty		
EML 2090	100V-290V	General Purpose	2 Years Onsite		
EML 3090	90V-300V	General Purpose	2 Years Onsite		
EML 5090	90V-300V	General Purpose	2 Years Onsite		
EML 8090	100V-290V	General Purpose	2 Years Onsite		
EML 10090	100V-290V	General Purpose	2 Years Onsite		





AUTOMATIC VOLTAGE STABILIZERS FOR LED







Automatic Voltage Stabilizers for LED TV

We have a complete Range of Energy Efficient Digital Voltage Stabilizers for TV/LCD/LED/DVD/DTH/Home Theatre System with Capacity, from 2.0 A to 3.0 A, suitable for all kinds of Power and Voltage Conditions. These MICROTEK Energy Efficient Digital Voltage Stabilizers are Perfect Guard for your equipment from Voltage fluctuations.

For Audio Visual System					
Models	Working Range	Applications W	arranty		
EMT 0790	90V - 300V	1 LED TV 81cm (32") + 1 DVD/DTH	3 Years		
EMT 1390	90V-300V	1 LED TV 122cm (48") + 1 DVD/DTH	3 Years		
EMT 2090	90V-300V	1 LED TV 165cm (65") + 1 DVD/DTH OR 1 LED/3D TV Upto 107cm (42") & Home Theater Sys. & DVD/DTH	3 Years		
EMT 3090	90V-290V	1 LED/3DTV 122cm (48") & Home Theater System + 1 DVD/DTH	3 Years		

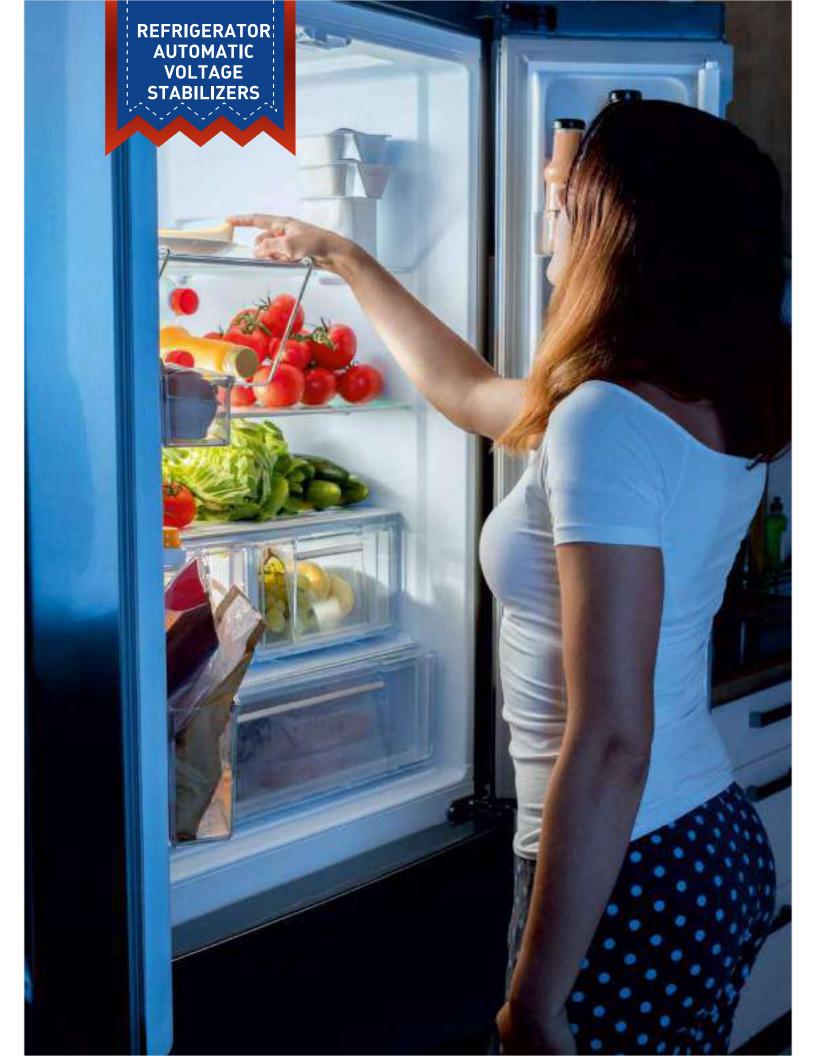
















Automatic Voltage Stabilizers for Refrierator

A range of energy efficient Digital Voltage Stabilizers for Refrigerators with Capacity from 2.0A to 4.0A, suitable for all kinds of power and voltage conditions They are the ideal guard for your equipment against voltage fluctuations.

For Refrigerator / Deep Freezer							
Models	Working Range	Applications	Warranty	Models	Working Range	Applications	Warranty
SMART EMR 2013 130V-295V	1 Refrigerator upto 300Ltr.	3 Years	EMR 2013	130V-295V	1 Refrigerator upto 300Ltr.	3 Years	
			EMR 2090	90V-260V	1 Refrigerator upto 300Ltr.	3 Years	
SMART EMR 2090	90V-260V	1 Refrigerator upto 300Ltr.	3 Years	EMR 4013	130V-295V	Refrigerator upto 600Ltr. OR Deep Freezer upto 4Amps.	3 Years
SMART EMR 4013	130V-295V	1 Refrigerator upto 600Ltr. OR 1 Deep Freezer upto 4Amps.	3 Years	EMR 4090	90V-260V	Refrigerator upto 600Ltr. OR Deep Freezer upto 4Amps.	3 Years



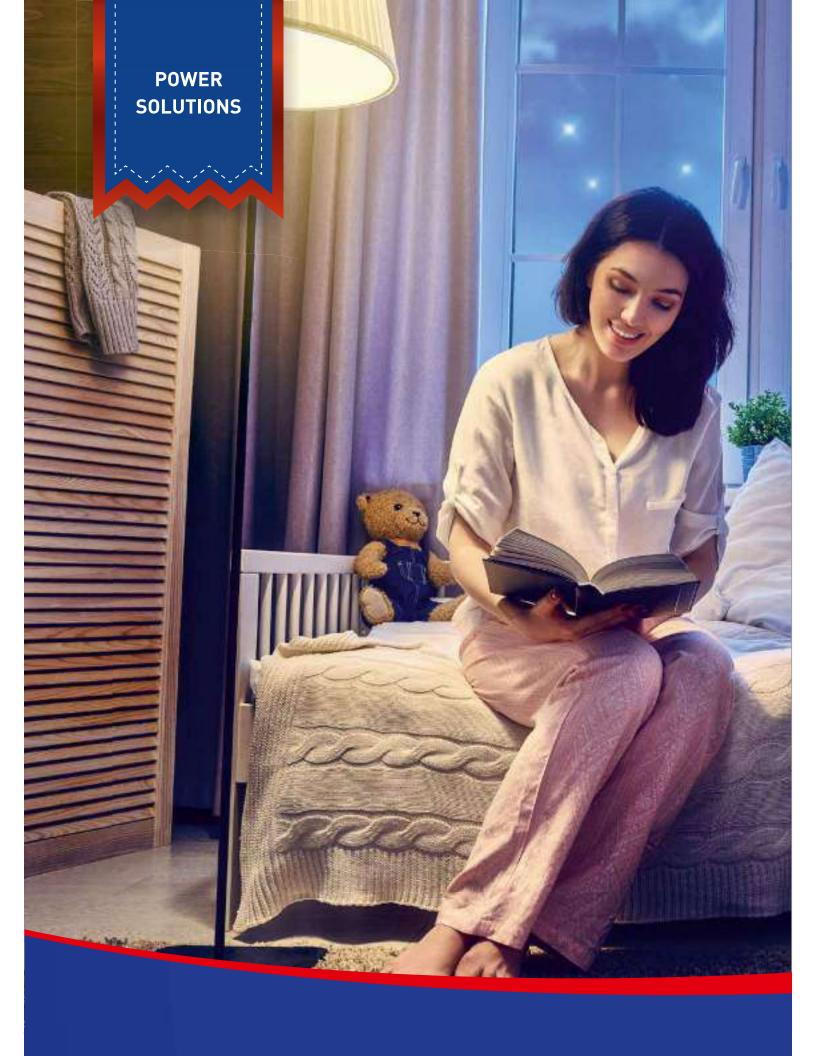

















Super Power High Performance UPS Series comes with super technology that gives super longer power backup and super longer battery life.













AVAILABLE MODELS IN DIGITAL & SINEWAVE - 700 (12V), 800 (12V), 900 (12V), 1000(12V) 1100 (12V), 1200(12V), 1700 (24V)









Environment Friendly UPS Series





Energy Saver Environment Friendly UPS Series is the most energy efficient UPS Series in it's category. It is powered by the industry Lowest Watt Loss El Core Transformer that helps in saving the maximum electricity and hence our hard earned money.







ZERO POWER SWITCHING Energy Saving While on Backup Mode







AVAILABLE MODELS IN DIGITAL & SINEWAVE - 825(12V), 1025(12V), 1225(12V) & 1825(24V)













iMerlyn Intelligent Premium UPS Series that has heavy load handling capacity and adds to the beauty of your home with its inspiring looks. Its 5 stage battery charging mechanism keeps the battery healthy and also provides longer battery life.













AVAILABLE MODELS IN DIGITAL & SINEWAVE - 850 (12V), 1050 (12V), 1250 (12V) & 1850 (24V)







PERFECT COMBINATION OF DIGITAL + SINEWAVE TECHNOLOGY











Smart Hybrid UPS Series is a Perfect Combination of Digital & Sinewave Technologies that gives you best of both the worlds - Noiseless performance & more load handling capacity.



IN-BUILT BYPASS SWITCH

Enables to Isolate the UPS from Mains, whenever needed



HIGH & STANDARD CHARGING OPTION

For Quick Battery Charging





UPS & INVERTER MODE For Running IT & Home Load





AVAILABLE MODELS -875(12V), 1075(12V), 1275(12V) & 1875(24V)





COMPATIBLE WITH ALL BATTERY TYPES

Tubular, Local & Flat Plate



IN-BUILT BYPASS **SWITCH Enables to Isolate the UPS**



UPS & INVERTER MODE



For Rural Area



IN-BUILT MCB

Total Safety from

Heavy Duty UPS Series is a High Torque Performance UPS Series which is specially designed to handle heavy loads easily.













AVAILABLE MODELS -1550 (12V), 2350 (24V) & 2350 SW (24V)

















LUXE LCD Home UPS Series is India's Most Intelligent & Smartest Home UPS with in-built micro computer that promises to always keep your home illuminated even during the power cuts.

It boasts of a beautifully designed power button and a smart LCD Display that shows you the running load status, backup time and battery charging time.









AVAILABLE MODELS - 1000 (12V), 1200 (12V), 1400 (12V) & 1900 (24V)













Jumbo UPS High Capacity Series

A series designed especially for small offices and home applications, it is Micro Processor based Intelli Pure Sinewave using latest state-of-the-art technology UPS for better performance and higher reliability. Ratings starting from 2.2KVA(24V) to 10KVA(180V)

- Advanced Battery Management (ABM) for Longer Battery Life & Quick Charging.
- Micro Processor based.
- Static UPS with LCD Display
- Pure Sinewave Output
- Smart Overload Sense and Short Circuit Protection
- Generator Compatible







AUTO RESET

CIRCUIT BREAKER

POWER SAVING














AVAILABLE MODELS -

MOSFET Based - 2500 (24V), 3000+ (24V), 3000 (36V), 3500 (36V), 4000(48V), 5500(48V), 6000(72V), IGBT Based - 6500i (96V), 9000i (120V), & 11000i (180V)



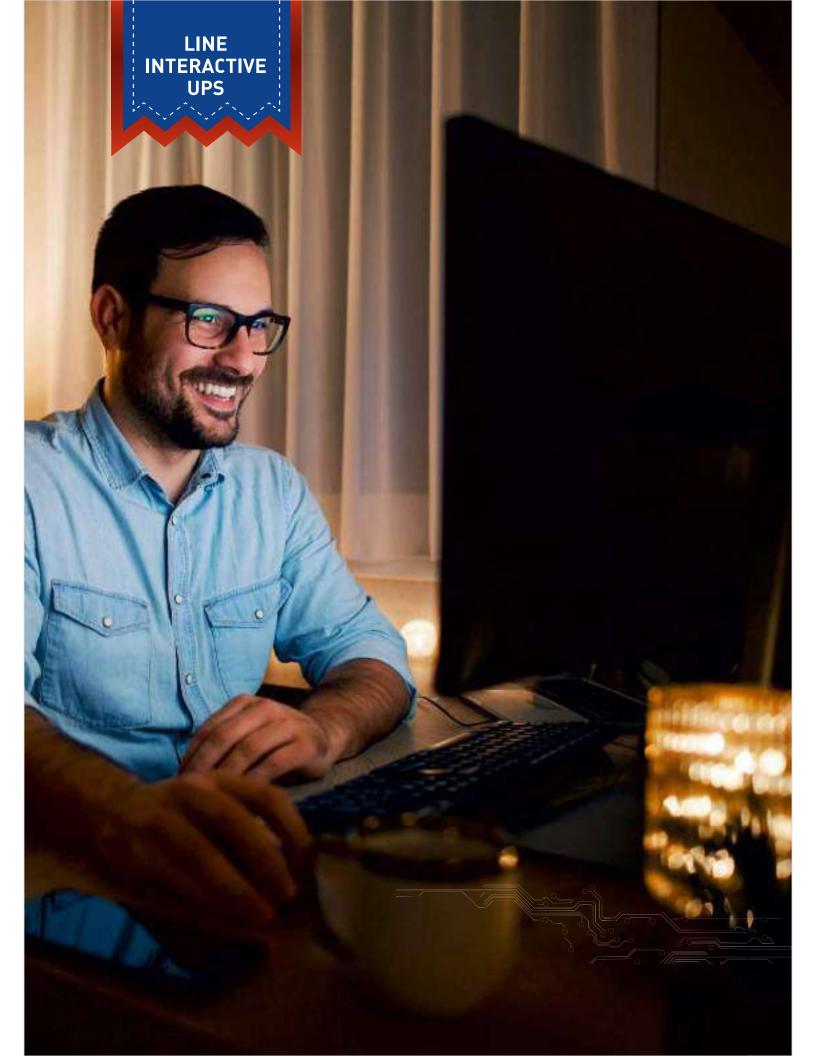







LEGENDE LEGENDE



Legend Line Interactive UPS with In-Built Battery Models

Microtek has complete range of Line Interactive UPS from 650VA(12V) to 1600VA(24V). The UPS are your ideal choice to provide complete protection to your Computers. Microtek is the only brand to manufacture these in India.

- Micro Processor based Load Sensing System, to sense Micro Power Consumption Devices.
- Long Backup for Micro Power Consumption Devices.
- Also suitable for Computer & other IT loads with normal Backup.
- Wide INPUT Range 142V~282V AC.
- Auto Restart while AC is recovering.
- Specially made Heavy Duty UPS for Indian Power Conditions.
- Generator/Inverter Compatible.



Security & Surveillance



Medical Equipments



Broadcast Studio



WIFI Modems

AVAILABLE MODELS -

Single Battery Model: 650, 750M Double Battery Model: 1000, 1600










Long Backup External Battery UPS

Microtek has complete range of Line Interactive UPS from 1000VA(12V) to 2000VA(24V). The UPS are your ideal choice to provide complete protection to your Computers. Microtek is the only brand to manufacture these in India.

- Excellent microprocessor control guarantees High Reliability.
- Boost and buck AVR for Voltage Stabilization.
- Selectable Charging Current.
- Auto Restart while AC is recovering.
- Simulated Sine wave.
- Off-mode Charging.
- Cold Start function.

AVAILABLE MODELS -1000VA (12V) to 2000VA (24V)



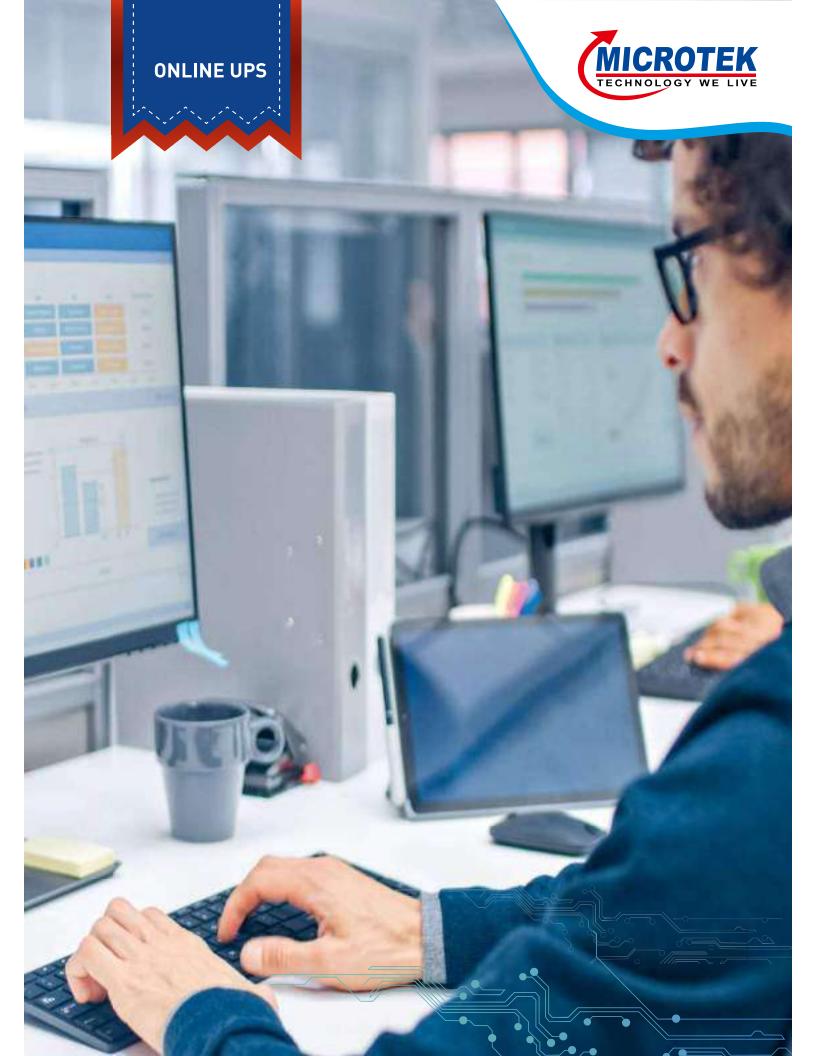







Energy Efficient High Frequency Online UPS

Microtek High Frequency Online UPS provides Uninterrupted Pure Power for Critical Applications such as Computer Network, Servers, Cyber Cafes, ATM Machines and CCTV Camera etc.

- High Frequency and Hybrid Double Automatic Battery Charging in UPS Off Conversion Online Technology.
- High End IGBT Based.
- High End Micro Controller Based.
- Wide Input Voltage Range.
- Advanced PFC Technology.
- Advanced Battery Management.

- Mode.
- Short Circuit and Overload Protection.
- Over Temperature Protection.
- EMI / RFI Noise Filter
- LCD/LED Display simultaneously
- Different Output Voltage settings.

AVAILABLE MODELS -1KVA (24V) IB & 1KVA (36V)









MAX+SERIES

High Performance High Frequency Series

Microtek High Frequency Online UPS provides Uninterrupted Pure Power for Critical Applications such as Computer Network, Servers, Cyber Cafes, ATM Machine, Labs etc.

- High Frequency and Hybrid Double Automatic Battery Charging in UPS Off Conversion Online Technology.
- High End IGBT Based.
- High End Micro Controller Based.
- Wide Input Voltage Range.
- Advanced PFC Technology.
- Advanced Battery Management.

- Mode.
- Short Circuit and Overload Protection.
- Over Temperature Protection.
- EMI / RFI Noise Filter
- LCD/LED Display simultaneously
- Different Output Voltage settings.

AVAILABLE MODELS -

Inbuilt Battery - 1KVA/36V IB, 2KVA/72V IB, 3KVA/72V IB External Battery - 1KVA/36V, 2KVA/72V, 3KVA/72V, 6KVA/192V, 10KVA/192V With Isolation Transformer - 1KVA ISO TX, 2KVA ISO TX, 3KVA ISO TX





MAX Life SERIES

Online UPS for Lithium Ion Battery Applications for longer back up

A wide range of Online UPS from 1KVA to 40KVA based on the world's latest technology to meet the harsh environmental and worst power conditions for applications ranging from small offices to space critical mission. It is compatible with Lithium-ion Battery.

- True double-conversion.
- Sine-wave Output.
- Output Power Factor 1.0.
- Settings.
- Compatible with Generator.
- Full Bridge inverter design to support half-wave load and unbalanced load.

- Cold Start Capability.
- Overload and Short Circuit Protection.
- Very Powerful AC Charger at 60A.
- Configurable Charging Current via LCD Optional Parallel Operation up to 9 units for Single Phase and Three Phase Applications.
 - Common 48V DC Battery Pack for the Parallel System.

AVAILABLE MODELS -1KVA/48V, 2KVA/48V, 3KVA/48V, 5KVA/48V











Intelligent Performance Low Frequency Series

Microtek offers Wide Range of Online UPS from 1KVA to 40KVA based on World's Latest Technology to meet the harsh Environmental and worst Power Conditions for Applications from Small Office requirement to Space Critical Missions with wide variety of Backup Range to meet the needs of every individual.

- inverter.
- information.
- Inbuilt OVCD with Surge Protection.
- EMI/RFI Noise Filter.
- CVCF Operational without Battery.

- DSP Technology with IGBT based Hot Stand-by, Cold Start & RS-232/USB Port features available.
- Smart LCD Display for Real-time Alarm for Mute Mode & SNMP Card (Optional).
 - Over Temperature Indication.
 - Configurable Output Voltage Settings.

AVAILABLE MODELS -IN BUILT ISOLATION TRANSFORMER BASED (1PH:1PH) 5.5KVA/192V, 7.5KVA/192V, 10KVA/192V









Intelligent Performance Low Frequency Series

Microtek offers Wide Range of Online UPS from 1KVA to 40KVA based on World's Latest Technology to meet the harsh Environmental and worst Power Conditions for Applications from Small Office requirement to Space Critical Missions with wide variety of Backup Range to meet the needs of every individual.

- inverter.
- Smart LCD Display for Real-time Alarm for Mute Mode & SNMP Card. information.
- CVCF Operational without Battery.
- Immune to Reverse Phase Sequence & no Neutral Operation.
- Hot Stand-by, Cold Start features Input filter for Power Factor 0.9 available.

- DSP Technology with IGBT based Conformal Coated PCB Assemblies to withstand harsh environment.

 - Over Temperature Indication.
 - Output Frequency fixed at 50Hz or can be synchronized with Input frequency.
 - Configurable Output Voltage Settings.
 - available.

AVAILABLE MODELS -IN BUILT ISOLATION TRANSFORMER BASED (3PH:1PH)

10KVA/192V, 15KVA/360V, 20KVA/360V







1/MAXX SERIES

Intelligent Performance Low Frequency Series

Microtek offers Wide Range of Online UPS from 1KVA to 40KVA based on World's Latest Technology to meet the harsh Environmental and worst Power Conditions for Applications from Small Office requirement to Space Critical Missions with wide variety of Backup Range meet the needs of every individual.

- DSP Technology with IGBT based Conformal Coated PCB Assemblies to inverter.
- Smart LCD Display for Real-time Alarm for Mute Mode & SNMP Card. information.
- CVCF Operational without Battery.
- Immune to Reverse Phase Sequence & no Neutral Operation.
- Hot Stand-by, Cold Start features Input filter for Power Factor 0.9 available.

- withstand harsh environment.
- Over Temperature Indication.
- Output Frequency fixed at 50Hz or can be synchronized with Input frequency.
- Configurable Output Voltage Settings.
- available.

AVAILABLE MODELS -IN BUILT ISOLATION TRANSFORMER BASED (3PH:3PH) 10KVA/360V, 20KVA/360V, 30KVA/360V





Super MAX+ SERIES

Super Performance High Frequency Series

Microtek offers Wide Range of Online UPS in 20 KVA, 30 KVA & 40 KVA based on World's Latest Technology to meet the harsh Environmental and worst Power Conditions for Applications from Small Office requirement to Space Critical Missions with wide variety of Backup Range to meet the needs of every individual.

- DSP Technology with IGBT based PFC & inverter section.
- Unity Output Power Factor.
- 3-Level IGBT Inverter design Maximizes Efficiency.
- Smart 4.3" Touch Panel LCD Display for Real-time information for measurement & adjustment of maximum parameters.
- Active Power Factor Correction in all 3-Phases.
- EMI Protection available at Input & Output.
- 50Hz/60Hz Frequency Converter mode.
- ECO mode operation for Energy Saving.
- Adjustable Battery Numbers (from 32 to 40 batteries).

AVAİLABLE MODELS - 20KVA+-192V , 30KVA+-192V and 40KVA+-192V








EVERY CRITICAL APPLICATION NEEDS A RELIABLE

BACKUP PARTNER



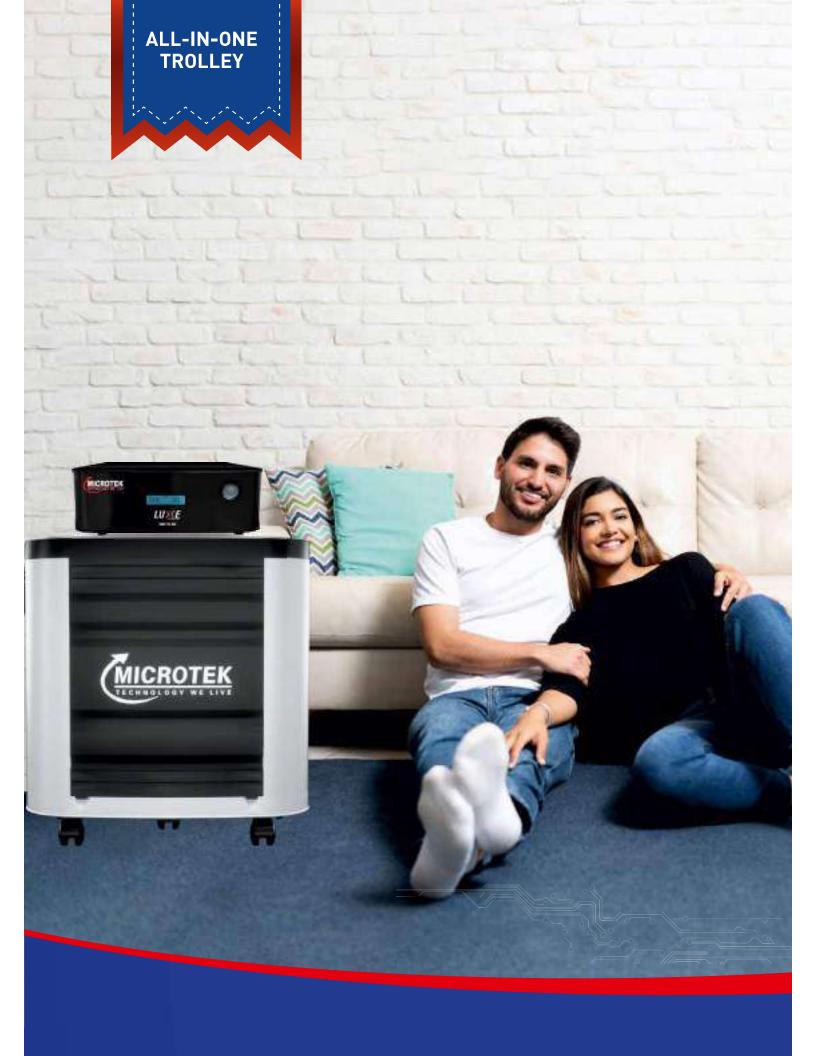









AIO (All-in-One) Trolley


Elegant, moveable, safe and made from long-lasting material, they protect your floor from acid spillage, in turn protecting the environment. These also take very little space because the battery is kept inside the trolley and the UPS is placed on top of it.

- Highly durable
- Protects the Floor from acid spillage and overflow
- Protection from Shocks and Safety for Children
- Extra strong & convenient to use
- 5 wheels including one wheel in the centre to give maximum support to battery
- Elegant looks for your Home
- Side ventilation outlets
- Open back for ease in water topping

USEFUL FOR -

Single Battery, Double Battery, Jumbo Battery, Flat-Plate Battery & Tall Tubular Battery



















E-Rickshaw Battery Charger


Technology that charges up every journey, E-rickshaw is the new lifeline that helps people travel shorter distances in lesser time. It also helps in giving livelihood to many families. Our E-rickshaw battery charger gives you turbocharging. It retains the charge of the battery for long hours, which helps cover extra miles.

- Quick Cut Technology.
- Multi-Stage Charging with Micro Less Water Topping. Controller Based Monitoring & Control.
- Suitable for All Battery Brands.
- 30% Faster Charging.
- Stabilizes Battery Gravity.
- Extends Battery Life.
- Over Temperature Protection.

- Gives Extra Mileage.
- Wide Oper. AC Input Range 90V-300V.
- Highest Power Factor up to 0.99.
- User-Friendly LED Indicators, show Battery Charging Status in percentage.
- In-built Overcharge Protection.
- Reverse Battery Polarity Protection.

AVAILABLE MODELS -TC-4816Q



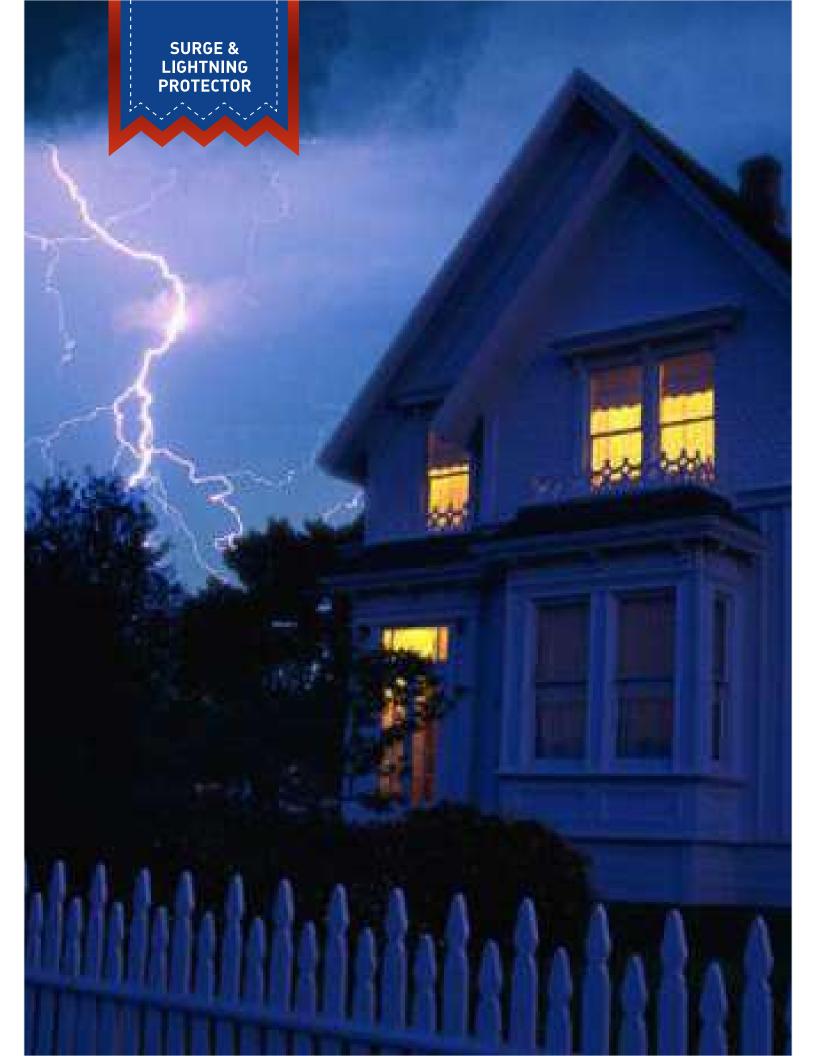







Surge and Lightning Protector

We are dedicated to supplying surge protective device. Equipped with simulated lightning strike equipment to detect the performance of our effective surge & lightning protector

- Point-of-use Application (type III SPD).
- Continuous Rated Current Of 6A.
- Maximum Discharge Current Rating Of 10KA For Surge Handling.
- Voltage Protection Of 390 X 3 Joules..
- Nominal Continuous Operating Voltage Of 240VAC ± 15%.
- EMI/RFI Filtering For Connected Load.

AVAILABLE MODELS - MLP 6A





Microtek Charter

We are in the business of bringing happiness and transforming the quality of life since 1986.

We have a proud legacy of leadership in Electronics and Technology products & services.

Our purpose is to enliven and energize lives, create comfort, well-being and safety for all.

We fulfill our consumer's needs, empowering and enabling them to realize their dreams.

We value

Integrity: Honouring our word.

Innovation: Creating and successfully adopting new ideas in all spheres with agility and velocity.

Excellence: Committed to being a benchmark in everything we deliver.

Transparency: We are open, honest and complete in our communications and dealings.

Alignment: Causing collaboration and partnership under all circumstances.

You can count on us for being समर्पित to our values.

We stand for each other's success.

We are committed for creating a profound positive impact in all the communities we touch and beyond.

We are MICROTEK!

Created: 1st February 2022 Chairman and Managing Director



Microtek International Pvt. Ltd.

H-57, Udyog Nagar, Rohtak Road, Delhi-110041 Customer Care Number: 72 83 83 83 83 Email us : ho@microtekdirect.com